


RoHS



材質	處理
S45C	染黑Fe <sub>3</sub> O <sub>4</sub>

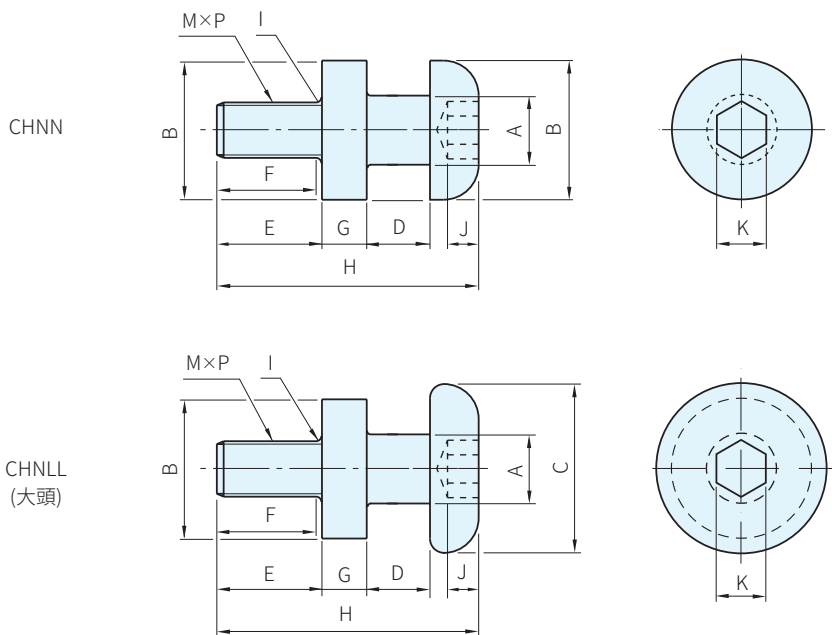

10倍的安全係數


品號		容許荷重 (N)	M×P	A	B	C	D		E	F	G	H		I	J	K	庫存	
Type	M						CHNN	CHNLL				CHNN	CHNLL				CHNN	CHNLL
CHNN	10	2452	10×1.5	13	32	42	10	18	20	16	8	46	54	1.5	5	8	·	·
	12	3530	12×1.75	16	36	48	13	20	24	20	10	57	64	1.5	6	10	·	·
	16	6669	16×2	20	40	52	18	25	30	25	13	75	82	2.0	9	14	·	·
CHNLL (大頭)	20	10395	20×2.5	25	48	62	20	28	37	32	16	90	98	2.0	12	17	·	·
	24	15004	24×3	32	58	76	25	33	47	40	20	111	119	2.5	13	19	·	·
	30	23830	30×3.5	36	68	88	30	40	56	48	22	131	141	3.0	16	22	·	·
	36	34814	36×4	40	78	100	30	40	68	58	25	148	158	3.0	18	27	·	·

■安裝方法 螺絲孔如下圖加工，CHNN/CHNLL的凸緣面和工作物面鎖到密著狀態下使用

訂貨：  交期：

CHNN10

M	d <sub>1</sub>	P
10	15	22
12	18	26
16	23	32
20	27	40
24	35	50
30	42	60
36	50	72



M	d <sub>2</sub>	P <sub>1</sub>	P <sub>2</sub>
10	12	22	5
12	14	26	6
16	18	32	6
20	22	40	6
24	28	50	8
30	34	60	9
36	40	72	11

