




材質	處理	硬度
SUJ2	高週波	HRC60~64

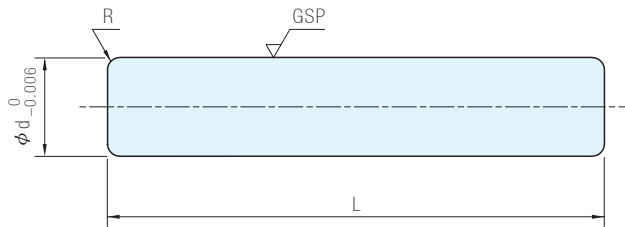

品 號		R	L																		
TYPE	d		90	100	110	120	130	140	150	160	170	180	190	200	210	220	230	240	250	260	
SPO	19	3	•	•	•	•	•	•	•	•	•	•	•								
	20		•	•	•	•	•	•	•	•	•	•	•								
	22					•	•	•	•	•	•	•	•								
	23					•	•	•	•	•	•	•	•								
	24	4					•	•	•	•	•	•	•								
	25						•	•	•	•	•	•	•								
	27							•	•	•	•	•	•	•							
	28							•	•	•	•	•	•	•							
	31									•	•	•	•	•	•	•	•				
	32										•	•	•	•	•	•	•	•			
	36										•	•	•	•	•	•	•	•			
	37										•	•	•	•	•	•	•	•			
	38	5								•	•	•	•	•	•	•	•				
	40									•	•	•	•	•	•	•	•				
	45										•	•	•	•	•	•	•	•			
	50												•	•	•	•	•	•	•		
56												•	•	•	•	•	•	•			

Wa. 注意

- 精度標準請參閱脫料板·導柱·導套單元FUTABA導柱導套的精度基準
- 此產品是日本進口, 缺貨時交期較久, 請儘可能提前4週訂貨

訂貨: × 交期: 天 d=20.22.24.25
 × 天 28.32.36.38
 其它

Ps. 備註

- 模座導柱專用之有機鉬強力潤滑劑請參閱化學產品單元S-00668