




材質	處理	硬度
SUJ2	高週波	HRC60~64

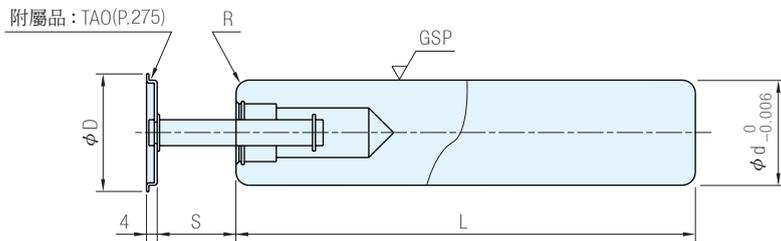

品號		D	R	S	L																
TYPE	d				110	120	130	140	150	160	170	180	190	200	210	220	230	240	250	260	
TPO	19	23	3	0~27	•	•	•	•	•												
	20				•	•	•	•	•	•	•	•									
	22					•	•	•	•	•	•	•									
	23	26			•	•	•	•	•	•	•										
	24					•	•	•	•	•	•	•									
	25						•	•	•	•	•	•	•	•							
	27	28	4	0~34				•	•	•	•	•	•	•							
	28							•	•	•	•	•	•	•	•						
	31										•	•	•	•	•	•	•				
	32	36	4	0~39					•	•	•	•	•	•	•	•					
	36									•	•	•	•	•	•	•	•				
	37											•	•	•	•	•	•	•	•		
	38	42	5	0~44						•	•	•	•	•	•	•	•				
	40										•	•	•	•	•	•	•	•			
	45												•	•	•	•	•	•	•	•	
	50	55	5	0~55							•	•	•	•	•	•	•	•	•		
56												•	•	•	•	•	•	•	•		
														•	•	•	•	•	•	•	

Wa. 注意

- 精度標準請參閱脫料板·導柱·導套單元FUTABA導柱導套的精度基準
- 此產品是日本進口, 缺貨時交期較久, 請儘可能提前4週訂貨

訂貨: 品號 × L 交期: 1 天 d=20.22.24.25
 TP019 × 110 20 天 28.32.36.38
 其它

Ps. 備註

- 模座導柱專用之有機鉬強力潤滑劑請參閱化學產品單元S-00668