



1 CLAMP AND BASE

Glass-fibre reinforced polyamide based (PA) technopolymer, RAL 9005 (C9) black colour or grey RAL 7040 (C33) colour, matte finish.



2 SCREWS AND NUTS (SUPPLIED)

Cylindrical-head screw with hexagon socket in AISI 304 stainless steel with anti-seizure treatment.



Self-locking nuts in AISI 304 stainless steel.



4 STANDARD EXECUTIONS

- TCC-TP-PBF-T: with teeth.
- TCC-TP-PBF-S: without teeth.



5 FEATURES

Joints comprising bases with external teeth and clamps with internal teeth (36 teeth) have a 10° adjustment angle.



Joints comprising bases and clamps without teeth can be positioned at any angle.



Clamps for tubes with a diameter of 30 ± 0.2 mm.



For smaller diameter tubes, the hole reduction sleeve can be used TCC-A (to be ordered separately).



The "s" grub screws may be replaced by the kit TCC-KS.



9 TECHNICAL DATA

The resistance values shown in the table were measured during laboratory tests at ambient temperature with the screws tightened to the maximum torque "C#".




11 ACCESSORIES ON REQUEST (TO BE ORDERED SEPARATELY)


- TCC-A (see page -): reduction sleeves.
- TCC-KS (see page -): clamping kit.
- GN 197 (see page -): monitor mounts.
- TCC-KV (see page -): screws and clamping nuts.
- GN 990 (see page -): connecting tubes.




ELESA Original design





TCC-KS-ERX



TCC-KS-EWN

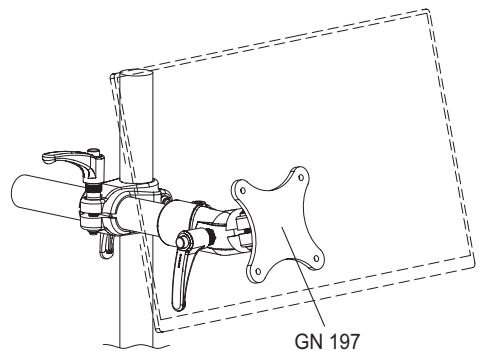

GN 197

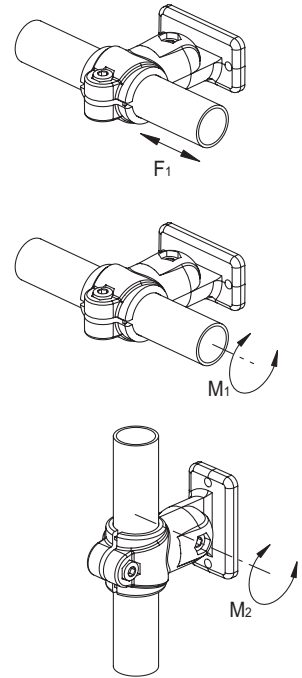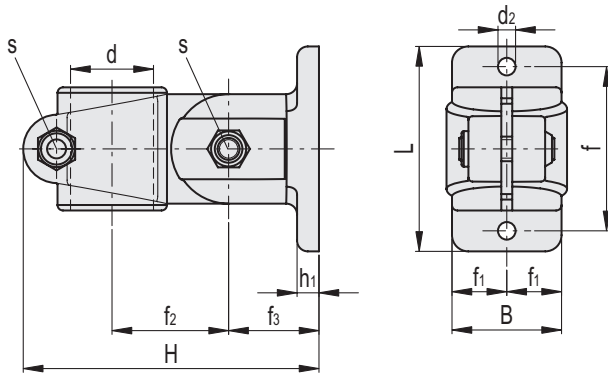

C9 RAL9005
 C33 RAL7040

TCC-TP-PBF-T

INOX STAINLESS STEEL

Code	Description	d	L	B	H	d2	f±0.2	f1	f2	f3	h1	s	C# [Nm]	F1* [N]	M1** [Nm]	M2*** [Nm]	⚖
600851-C9	TCC-TP-PBF-30-T-C9	30	75	40	108	6.5	60	20	42	33	8	M8	12	3000	33	100	145
600851-C33	TCC-TP-PBF-30-T-C33	30	75	40	108	6.5	60	20	42	33	8	M8	12	3000	33	100	145

TCC-TP-PBF-S

INOX STAINLESS STEEL

Code	Description	d	L	B	H	d2	f±0.2	f1	f2	f3	h1	s	C# [Nm]	F1* [N]	M1** [Nm]	M2*** [Nm]	⚖
600852-C9	TCC-TP-PBF-30-S-C9	30	75	40	108	6.5	60	20	42	33	8	M8	12	3000	33	4	145
600852-C33	TCC-TP-PBF-30-S-C33	30	75	40	108	6.5	60	20	42	33	8	M8	12	3000	33	4	145

Suggested torque for screw assembly.
 * Resistance to tube pull out
 ** Resistance to tube rotation
 *** Resistance to joint rotation.

