




| 材質 | 處理 | 硬度 |
|------|-----|----------|
| SUJ2 | 高週波 | HRC58~64 |

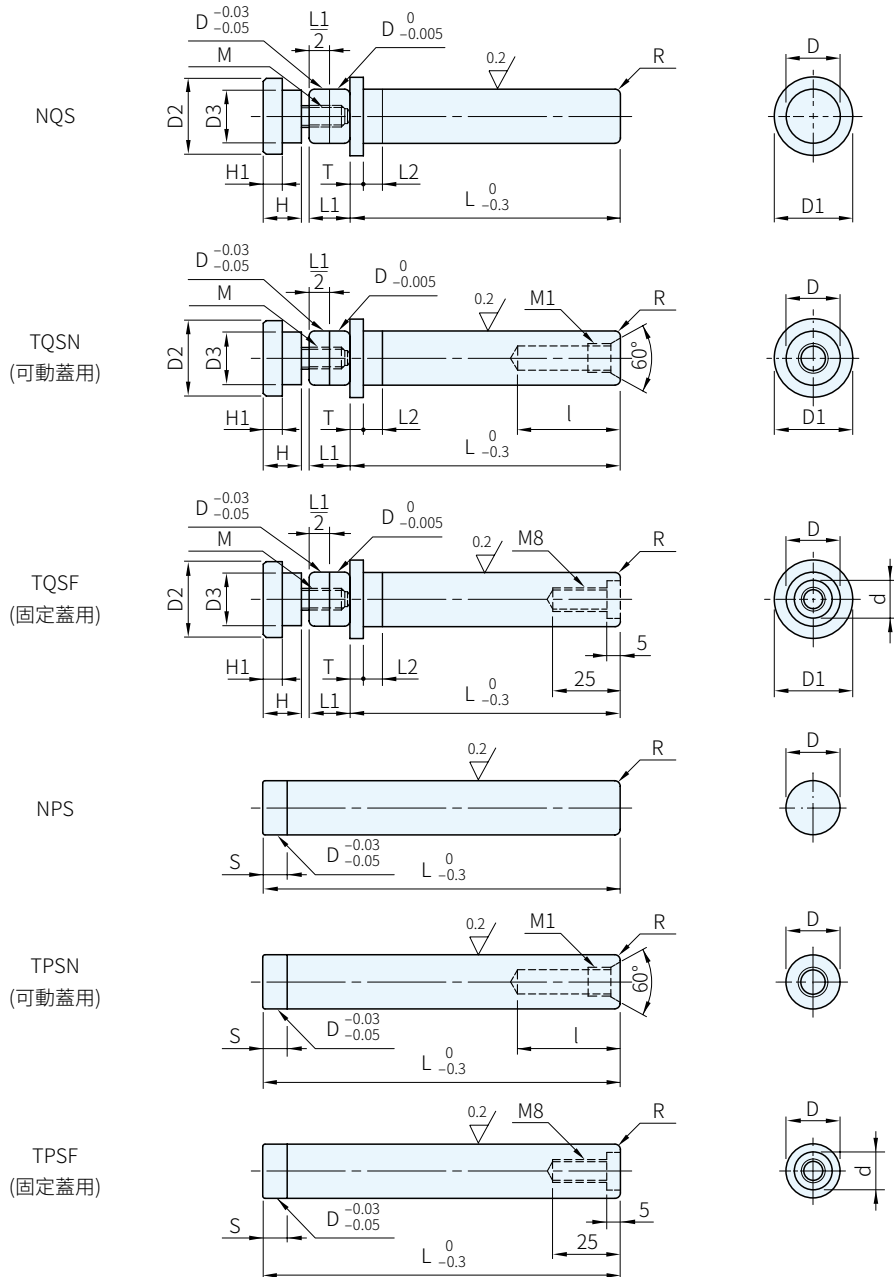

| 品號 | | D1 | T | L1 | L2 | l | M1×P | d | S | M | R | D2 | D3 | H | H1 | 附屬螺絲 |
|--|----|------------------|----|----|----|----|------|----|------|-------|------|------|------|----|----|-------|
| TYPE | D | | | | | | | | | | | | | | | |
| NQS TQSN TQSF NPS TPSN TPSF | 20 | +0.020 +0.015 | 29 | 5 | 15 | 10 | 38 | 14 | 4 | M8×18 | 2.0 | 28 | 19.5 | 14 | 7 | M8-25 |
| | 22 | | 31 | 16 | 42 | | 30 | | | | | 21.5 | | | | |
| | 25 | | 35 | 18 | 50 | | 35 | | | | | 24.5 | | | | |
| | 28 | +0.025 +0.020 | 39 | 10 | 20 | 50 | 36 | | | | | 27.5 | | | | |
| | 32 | | 44 | | 23 | | | | 60 | 40 | 31.5 | | | | | |
| | 38 | +0.030 +0.025 | 53 | 12 | 27 | 60 | 49 | | 37.5 | | | | | | | |
| | 45 | | 59 | | 32 | | | | 70 | 55 | 44.5 | | | | | |
| | 50 | +0.035 +0.030 | 69 | 15 | 35 | 70 | 62 | | 49.5 | | | | | | | |
| 60 | 79 | | 42 | | 70 | | | 72 | 59.5 | | | | | | | |

| 品號 | | L | | | | | | | | | | | | 庫存 | | |
|----------------|----|----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----------|---|
| TYPE | D | | | | | | | | | | | | | NQS | TQSN/TQSF | |
| NQS | 20 | 80 | 90 | 100 | 110 | 120 | | | | | | | | | △ | △ |
| | 22 | 80 | 90 | 100 | 110 | 120 | | | | | | | | | △ | △ |
| | 25 | 80 | 90 | 100 | 110 | 120 | 130 | | | | | | | | △ | △ |
| TQSN (可動蓋用) | 28 | | | 100 | 110 | 120 | 130 | 140 | 150 | 160 | | | | | △ | △ |
| | 32 | | | | | 120 | 130 | 140 | 150 | 160 | | | | | △ | △ |
| TQSF (固定蓋用) | 38 | | | | | | | 140 | 150 | 160 | 170 | 180 | | | △ | △ |
| | 45 | | | | | | | 140 | 150 | 160 | 170 | 180 | | | △ | △ |
| | 50 | | | | | | | | | 160 | 170 | 180 | 200 | | △ | △ |
| 60 | | | | | | | | | | 160 | 170 | 180 | 200 | | △ | △ |

| 品號 | | L | | | | | | | | | | | | 庫存 | | |
|----------------|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----------|---|
| TYPE | D | | | | | | | | | | | | | NPS | TPSN/TPSF | |
| NPS | 20 | 100 | 110 | 120 | 130 | 140 | 150 | 160 | 170 | 180 | | | | | △ | △ |
| | 22 | | | 120 | 130 | 140 | 150 | 160 | 170 | 180 | | | | | △ | △ |
| | 25 | | | 120 | 130 | 140 | 150 | 160 | 170 | 180 | | | | | △ | △ |
| TPSN (可動蓋用) | 28 | | | | 140 | 150 | 160 | 170 | 180 | 190 | 200 | | | | △ | △ |
| | 32 | | | | | | 160 | 170 | 180 | 190 | 200 | 220 | 240 | | △ | △ |
| TPSF (固定蓋用) | 38 | | | | | | | | 180 | 190 | 200 | 220 | 240 | 260 | △ | △ |
| | 45 | | | | | | | | 180 | 190 | 200 | 220 | 240 | 260 | △ | △ |
| | 50 | | | | | | | | | 200 | 220 | 240 | 260 | △ | △ | |
| 60 | | | | | | | | | | 200 | 220 | 240 | 260 | △ | △ | |

PS. 備註

· 模座導柱專用之有機鉍強力潤滑劑請參閱化學產品單元 S-00668

訂貨： TYPE - L 交期： 6 天

NQS20 - 80