



















- 1 
- 2 
- 3 
- 4 
- 5 
- 6 
- 7 
- 8 
- 9 
- 10 
- 11 
- 12 
- 13 
- 14 
- 15 
- 16 
- 17 
- 18 

**MATERIAL**

Glass-fibre reinforced polyamide based (PA) technopolymer, grey-black colour, matte finish.

**MICROSWITCH WITH BUTTON**

The device is made up of a bistable normally open contact (NO).  
 Switching takes place by pressing the purple button, and remains switched until pressed again.  
 Contact resistance: max. 0.050 Ω  
 Isolation resistance: min. 1 GΩ at 500 VDC

**LED**

A red Led and a green Led can be configured through external logic to indicate the switch status.  
 Voltage range 24 Vdc ± 15%

**SCREW-COVERS**

Technopolymer, grey-black colour, matte finish. Supplied assembled, removable by a screwdriver.

**IP PROTECTION**

IP 65 protection class, according to EN 60529 (see page A-19).

**STANDARD EXECUTIONS**

- Pass-through holes for cylindrical-head screws with hexagon socket.
- **EBR-SWB-B-C**: zinc-plated connector with 8 poles, back output.
  - **EBR-SWB-L-C**: zinc-plated steel connector with 8 poles, left side output.
  - **EBR-SWB-R-C**: zinc-plated connector with 8 poles, right side output.
  - 8 pole cable UL: AWG22 RAL9005 PVC UL AWM Style 1569/2517.
  - **EBR-SWB-B-F2.5**: 8 pole cable, length 2.5 metres, back output.
  - **EBR-SWB-B-F5**: 8 pole cable, length 5 metres, back output.
  - **EBR-SWB-L-F2.5**: 8 pole cable, length 2.5 metres, left side output.
  - **EBR-SWB-L-F5**: 8 pole cable, length 5 metres, left side output.
  - **EBR-SWB-R-F2.5**: 8 pole cable, length 2.5 metres, right side output.
  - **EBR-SWB-R-F5**: 8 pole cable, length 5 metres, right side output.

**FEATURES AND APPLICATIONS**

- This handle is used when it is necessary for the switching to be prolonged over time.
- Through external logic, the Leds can be configured to indicate the specific status of the button. Example: button in neutral position green Led on, button switched on red Led off.
- The mechanical life of the button is 200000 cycles.
- In case of use of an extension with angled connector, the direction of the cable output is shown in the Fig.1.
- EBR-SWB handle can be assembled with EBR neutral handle.

**ACCESSORIES ON REQUEST**

FC-M12x1: extensions with 8 pole M12 female axial connector.

**OTHER STANDARD EXECUTIONS**

- EBR.: single complementary handle without switch.
- EBR-SWM: handle with monostable electrical switch.



ERGOSTYLE® ELESA Original design



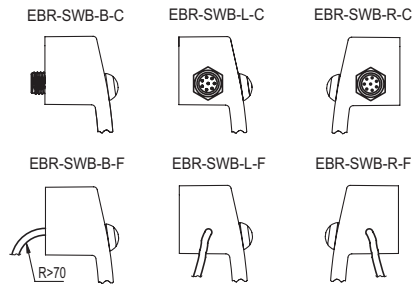



Fig.1




**CONTACT WIRING CABLE**



**PUSH BUTTON**





**LEDS**



Electrical Features			
Load	Voltage	Current	Max Cycles
Resistive	12 Vdc	4 A	200000
Resistive	48 Vdc	1 A	200000
Resistive	48 Vdc	2 A	100000
Resistive	48 Vdc	3 A	75000
Logic level	5 Vdc	10 mA	200000
DWV	1000 Vrms	-	-


**TECHNICAL DATA**

Tensile stress and impact strength: the values F1, F2, L1 and L2 indicated in the table were obtained during breaking tests carried out with the appropriate dynamometric equipment under the test conditions shown in the figure with ambient temperature.

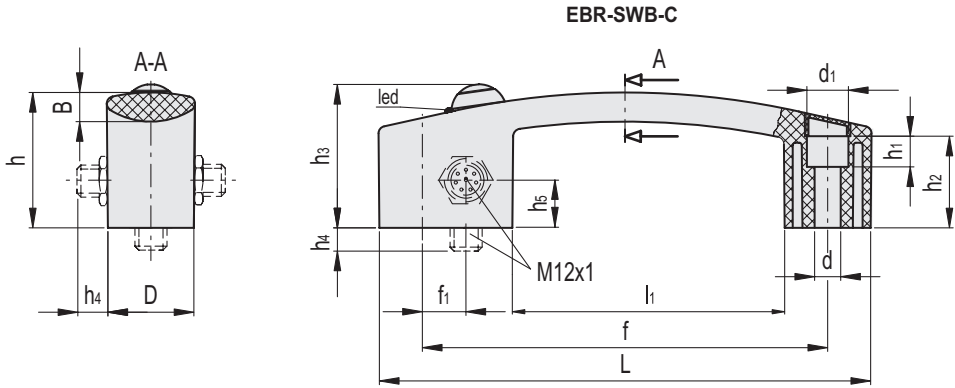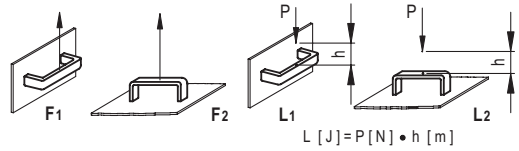

**EBR-SWB-C**

Code	Description	L	f	d	d1	f1	D	h	h1	h2	h3	h4	h5	B	l1	F1 [N]	F2 [N]	L1 [J]	L2 [J]	⚖
260571-C1	EBR.150-SWB-B-C	160	132±0.5	8.5	13.5	16	28	44	10	30	47	11	-	8.5	89	2800	2900	35	8	96
260581-C1	EBR.150-SWB-L-C	160	132±0.5	8.5	13.5	16	28	44	10	30	47	16	13	8.5	89	2800	2900	35	8	96
260591-C1	EBR.150-SWB-R-C	160	132±0.5	8.5	13.5	16	28	44	10	30	47	16	13	8.5	89	2800	2900	35	8	96

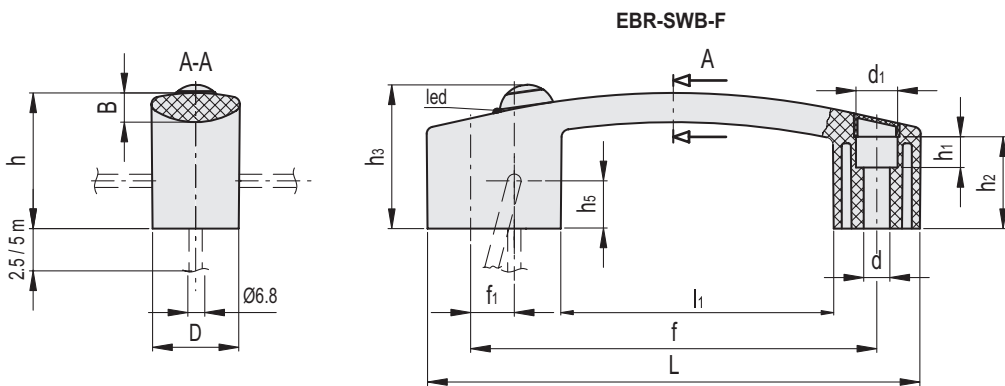

**EBR-SWB-F**

Code	Description	L	f	d	d1	f1	D	h	h1	h2	h3	h5	B	l1	F1 [N]	F2 [N]	L1 [J]	L2 [J]	⚖
260576-C1	EBR.150-SWB-B-F2,5	160	132±0.5	8.5	13.5	16	28	44	10	30	47	-	8.5	89	2800	2900	35	8	220
260572-C1	EBR.150-SWB-B-F5	160	132±0.5	8.5	13.5	16	28	44	10	30	47	-	8.5	89	2800	2900	35	8	344
260586-C1	EBR.150-SWB-L-F2,5	160	132±0.5	8.5	13.5	16	28	44	10	30	47	13	8.5	89	2800	2900	35	8	220
260582-C1	EBR.150-SWB-L-F5	160	132±0.5	8.5	13.5	16	28	44	10	30	47	13	8.5	89	2800	2900	35	8	344
260596-C1	EBR.150-SWB-R-F2,5	160	132±0.5	8.5	13.5	16	28	44	10	30	47	13	8.5	89	2800	2900	35	8	220
260592-C1	EBR.150-SWB-R-F5	160	132±0.5	8.5	13.5	16	28	44	10	30	47	13	8.5	89	2800	2900	35	8	344

