




材質	硬度
SUJ2	HRC58~64

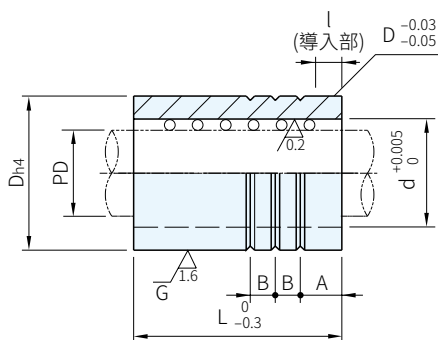

TYPE	品號		L					d	D _{h4}	l	A	B	庫存		
	PD	導柱徑													
DTT	20		50	60				26	37	-0.007	4	10	6	△	
	22	+0.020	50	60				28	40					△	
	25	+0.015		60	80			31	45					△	
	28	+0.025		60	80	100		36	50	-0.008	5	12	7	△	
	32	+0.020			80	100		40	55					△	
	38	+0.030				80	100		48	64	0	6	15	10	△
	45	+0.025				100	120	55	74	△					
	50	+0.035				100	120	60	83	△					
60	+0.030				100	120	70	95	-0.010					△	

WA) 注意

· DTT請以厭氧膠LOC680(參閱化學產品單元)黏著固定

訂貨： TYPE - L 交期： 6 天

DTT20 - 50

PS) 備註

· 模座導件專用之有機鉬強力潤滑劑請參閱化學產品單元 S-00668