




6500


6501

6509

材質	硬度
1.3505軸承鋼	HRC62~64

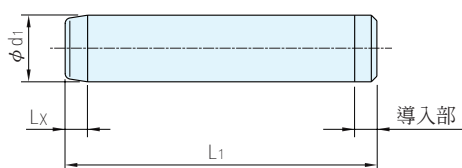

6500, 6501

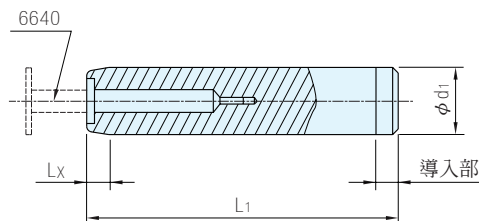

6509

品號	$d_1$ $h_3$	$L_1$	$L_x$	單價
6500.003.030	$3 \begin{smallmatrix} 0 \\ -0.002 \end{smallmatrix}$	30	0.4	•
6500.003.040		40	0.4	•
6500.003.050		50	0.4	•
6500.003.060		60	0.4	•
6500.003.080		80	0.4	•
6500.003.100		100	0.4	•
6500.004.030		$4 \begin{smallmatrix} 0 \\ -0.0025 \end{smallmatrix}$	30	0.4
6500.004.040	40		0.4	•
6500.004.050	50		0.4	•
6500.004.060	60		0.4	•
6500.004.080	80		0.4	•
6500.004.100	100	0.4	•	
6500.005.030	$5 \begin{smallmatrix} 0 \\ -0.0025 \end{smallmatrix}$	30	0.4	•
6500.005.040		40	0.4	•
6500.005.050		50	0.4	•
6500.005.060		60	0.4	•
6500.005.080		80	0.4	•
6500.005.100	100	0.4	•	
6500.006.040	$6 \begin{smallmatrix} 0 \\ -0.0025 \end{smallmatrix}$	40	0.4	•
6500.006.050		50	0.4	•
6500.006.060		60	0.4	•
6500.006.080		80	0.4	•
6500.006.100		100	0.4	•
6500.006.120		120	0.4	•

品號	$d_1$ $h_3$	$L_1$	$L_x$	單價
6500.008.040	$8 \begin{smallmatrix} 0 \\ -0.0025 \end{smallmatrix}$	40	0.4	•
6500.008.050		50	0.4	•
6500.008.060		60	0.4	•
6500.008.080		80	0.4	•
6500.008.100		100	0.4	•
6500.008.120		120	0.4	•
6500.008.140		140	0.4	•
6500.010.050	$10 \begin{smallmatrix} 0 \\ -0.0025 \end{smallmatrix}$	40	0.4	•
6500.010.060		50	0.4	•
6500.010.080		60	0.4	•
6500.010.100		80	0.4	•
6500.010.120		100	0.4	•
6500.010.140	120	0.4	•	
6500.010.160	140	0.4	•	
6501.012.060	$12 \begin{smallmatrix} 0 \\ -0.003 \end{smallmatrix}$	60	0.4	•
6501.012.080		80	0.4	•
6501.012.100		100	0.4	•
6501.012.120		120	0.4	•
6501.012.140		140	0.4	•
6501.012.160		160	0.4	•
6501.012.180	180	0.4	•	
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-

**Sp. 特長**

- 導柱表面超精密研磨加工 $N_2(N_1) \pm 0.1 \mu$

**Wa. 注意**

- 建議配合孔孔徑公差N5
- 導柱專用之有機鉬強力潤滑劑請參閱化學產品單元S-00668
- AGATHON產品是瑞士進口, 缺貨時交期較久, 請儘可能提前4週訂貨

品 號	d1 h3	L1	Lx	單 價	品 號	d1 h3	L1	Lx	單 價
6501.015.090	15 <sup>0</sup> <sub>-0.003</sub>	90	5	•	6501.032.125	32 <sup>0</sup> <sub>-0.004</sub>	125	5	•
6501.015.100		100	5	•	650_.032.140		140	5	•
6501.015.125		125	5	•	650_.032.160		160	5	•
6501.015.140		140	5	•	650_.032.180		180	5	•
6501.015.160		160	5	•	650_.032.200		200	5	•
6501.015.180		180	5	•	650_.032.224		224	5	•
6501.016.090	16 <sup>0</sup> <sub>-0.003</sub>	90	5	•	650_.032.250		250	5	•
6501.016.100		100	5	•	650_.032.280		280	5	•
6501.016.125		125	5	•	650_.032.315		315	5	•
6501.016.140		140	5	•	6501.038.160		38 <sup>0</sup> <sub>-0.004</sub>	160	5
6501.016.160	160	5	•	6501.038.180	180	5		•	
6501.016.180	180	5	•	6501.038.200	200	5		•	
6501.019.112	19 <sup>0</sup> <sub>-0.004</sub>	112	5	•	6501.038.224	224		5	•
6501.019.125		125	5	•	6501.038.250	250		5	•
6501.019.140		140	5	•	6501.038.280	280		5	•
6501.019.160		160	5	•	6501.038.315	315	5	•	
6501.019.180		180	5	•	6501.038.400	400	5	•	
6501.019.200		200	5	•	650_.040.160	160	5	•	
6501.019.224	224	5	•	650_.040.180	180	5	•		
6501.020.112	20 <sup>0</sup> <sub>-0.004</sub>	112	5	•	650_.040.200	200	5	•	
6501.020.125		125	5	•	650_.040.224	224	5	•	
6501.020.140		140	5	•	650_.040.250	250	5	•	
6501.020.160		160	5	•	650_.040.280	280	5	•	
6501.020.180		180	5	•	650_.040.315	315	5	•	
6501.020.200		200	5	•	650_.040.400	400	5	•	
6501.020.224	224	5	•	6501.048.180	180	5	•		
6501.024.125	24 <sup>0</sup> <sub>-0.004</sub>	125	5	•	6501.048.224	224	5	•	
6501.024.140		140	5	•	6501.048.280	280	5	•	
6501.024.160		160	5	•	6501.048.315	315	5	•	
6501.024.180		180	5	•	6501.048.355	355	5	•	
6501.024.200		200	5	•	6501.048.400	400	5	•	
6501.024.224		224	5	•	6501.048.500	500	5	•	
6501.024.250	250	5	•	650_.050.180	180	5	•		
6501.024.280	280	5	•	650_.050.224	224	5	•		
6501.025.125	25 <sup>0</sup> <sub>-0.004</sub>	125	5	•	650_.050.280	280	5	•	
6501.025.140		140	5	•	650_.050.315	315	5	•	
6501.025.160		160	5	•	650_.050.355	355	5	•	
6501.025.180		180	5	•	650_.050.400	400	5	•	
6501.025.200		200	5	•	650_.050.500	500	5	•	
6501.025.224		224	5	•	6501.060.280	280	5	•	
6501.025.250	250	5	•	6501.060.355	355	5	•		
6501.025.280	280	5	•	6501.060.400	400	5	•		
6501.030.125	30 <sup>0</sup> <sub>-0.004</sub>	125	5	•	6501.060.500	500	5	•	
6501.030.140		140	5	•	650_.063.280	280	5	•	
6501.030.160		160	5	•	650_.063.355	355	5	•	
6501.030.180		180	5	•	650_.063.400	400	5	•	
6501.030.200		200	5	•	650_.063.500	500	5	•	
6501.030.224		224	5	•	—	—	—	—	
6501.030.250	250	5	•	—	—	—	—		
6501.030.280	280	5	•	—	—	—	—		
6501.030.315	315	5	•	—	—	—	—		

## Ps. 備註

• 品號650\_有6501、6509

訂貨：  交期： 

6501.015.090