



材質	硬度
1.3505軸承鋼	HRC62~64

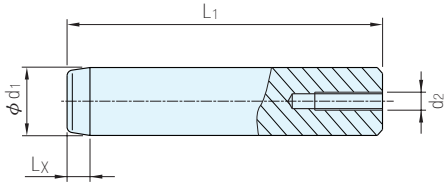

6540,6541

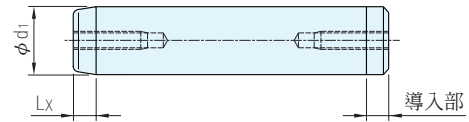

6542

品 號	d1 h3	d2	L1	Lx	單 價
6540.010.100	10 ⁰ _{-0.0025}	M 5×13	100	0.4	•
6541.012.100	12 ⁰ _{-0.003}	M 6×17	100	0.4	•
6541.012.140			140	0.4	•
6541.015.125	15 ⁰ _{-0.003}	M 6×17	125	5.0	•
6541.016.100	16 ⁰ _{-0.003}	M 6×17	100	5.0	•
6541.016.125			125	5.0	•
6541.016.160			160	5.0	•
6542.019.125	19 ⁰ _{-0.004}	M 8×20	125	5.0	•
6542.019.160			160	5.0	•
6542.020.125	20 ⁰ _{-0.004}	M 8×20	125	5.0	•
6542.020.160			160	5.0	•
6542.024.140	24 ⁰ _{-0.004}	M 8×20	140	5.0	•
6542.025.140	25 ⁰ _{-0.004}	M 8×20	140	5.0	•
6542.030.140	30 ⁰ _{-0.004}	M 8×20	140	5.0	•
6542.032.140	32 ⁰ _{-0.004}	M 8×20	140	5.0	•
6542.032.250			250	5.0	•
6542.040.250	40 ⁰ _{-0.004}	M 8×20	250	5.0	•

Wa. 注意

- 建議配合孔孔徑公差M5
- 導柱專用之有機鉬強力潤滑劑請參閱化學產品單元S-00668
- AGATHON產品是瑞士進口,缺貨時交期較久,請儘可能提前4週訂貨

訂貨： 交期：

6540.010.100

Sp. 特長

- 導柱表面超精密研磨加工N₂(N₁)±0.1 μ