


RoHS

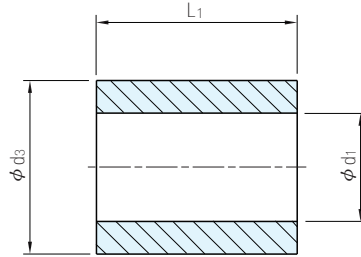

材質	硬度
自潤燒結合金	HRB100±10

品號	d1	d3 js4	L1	單價
7020.010.015	10 $\begin{smallmatrix} +0.005 \\ +0.002 \end{smallmatrix}$	20±0.003	15	•
7020.010.023			23	•
7021.012.023	12 $\begin{smallmatrix} +0.005 \\ +0.002 \end{smallmatrix}$	22±0.003	23	•
7021.012.030			30	•
7021.015.023	15 $\begin{smallmatrix} +0.006 \\ +0.003 \end{smallmatrix}$	28±0.003	23	•
7021.015.030			30	•
7021.015.037			37	•
7021.016.023	16 $\begin{smallmatrix} +0.006 \\ +0.003 \end{smallmatrix}$	28±0.003	23	•
7021.016.030			30	•
7021.016.037			37	•
7021.019.023	19 $\begin{smallmatrix} +0.006 \\ +0.003 \end{smallmatrix}$	32±0.0035	23	•
7021.019.030			30	•
7021.019.037			37	•
7021.020.023	20 $\begin{smallmatrix} +0.006 \\ +0.003 \end{smallmatrix}$	32±0.0035	23	•
7021.020.030			30	•
7021.020.037			37	•
7021.024.030	24 $\begin{smallmatrix} +0.006 \\ +0.003 \end{smallmatrix}$	40±0.0035	30	•
7021.024.047			47	•
7021.025.030	25 $\begin{smallmatrix} +0.006 \\ +0.003 \end{smallmatrix}$	40±0.0035	30	•
7021.025.047			47	•
7021.030.047	30 $\begin{smallmatrix} +0.006 \\ +0.003 \end{smallmatrix}$	48±0.0035	47	•
7021.032.047	32 $\begin{smallmatrix} +0.006 \\ +0.003 \end{smallmatrix}$	48±0.0035	47	•

Wa. 注意

- 建議配合孔徑公差H5
- 建議以厭氧膠LOC680(參閱化學產品單元)黏著固定
- 壓入配合會造成內徑收縮及變形,影響精度,請勿壓配

 訂貨: 交期:

7020.010.015

Ps. 備註

- 導柱專用之有機鉬強力潤滑劑請參閱化學產品單元S-00668
- AGATHON產品是瑞士進口,缺貨時交期較久,請儘可能提前4週訂貨