


RoHS

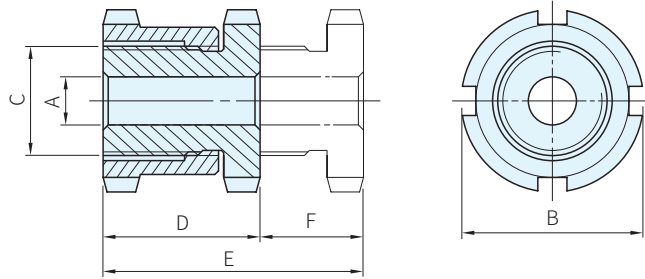

材質	處理
鋼	鍍鋅、鍍鉻

品號	A	B	C	D ~	E ~	行程 F ~	適用 螺栓	靜荷重 max. kN	動荷重 max. kN	質量 g	庫存
25120.0106	6.6	25	M15×1	28	43	15	M6	40	30.7	68	△
25120.0112									55.7	161	△
25120.0114	9.0	32	M20×1	35	55	20	M8	65	48.0	152	△
25120.0116									37.9	142	△
25120.0122	11.0						M10		92.9	371	△
25120.0124	13.5	45	M30×1.5	42	67	25	M12	120	80.4	356	△
25120.0126									45.5	326	△
25120.0132	17.5						M16		136.0	835	△
25120.0134	22.0	58	M40×1.5	54	86	32	M20	210	90.0	771	△
25120.0136	26.0						M24		37.0	705	△
25120.0142	22.0						M20		210.0	1421	△
25120.0144	26.0	70	M50×1.5	66	106	40	M24	330	157.0	1329	△
25120.0146	33.0						M30		53.0	1167	△

SP. 特長

- 適用於機械或工件的高度和水平調整
- 貫穿式中心孔適合鎖固件通過
- 限制最大行程的設計

 訂貨： 交期： 天

25120.0106

Ex. 使用例