


RoHS




材質	硬度
1.3505軸承鋼	HRC62~64

7811

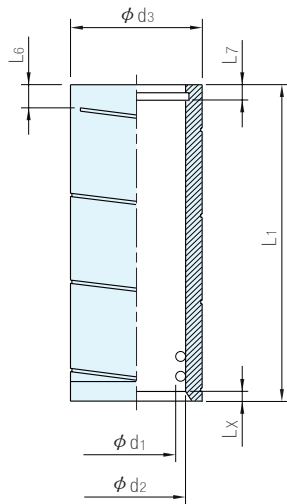

7812

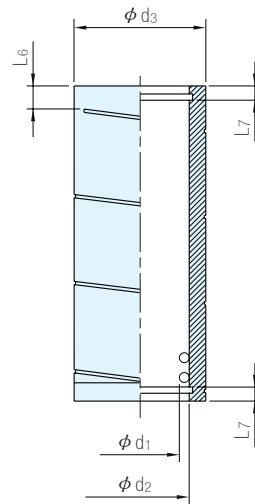

品號	單價	品號	單價	d1	d2	d3 js4	L1	L6	L7	LX
7811.015.060	•	7812.015.060	•	15	21	28 ±0.003	60	7	4	2
7811.016.060	•	7812.016.060	•	16	22	28 ±0.003	60	7	4	2
7811.019.060	•	7812.019.060	•	19	25	32 ±0.0035	60	7	4	2
7811.020.060	•	7812.020.060	•	20	26	32 ±0.0035	60	7	4	2
7811.024.095	•	7812.024.095	•	24	30	40 ±0.0035	95	7	4	2
7811.025.095	•	7812.025.095	•	25	31	40 ±0.0035	95	7	4	2

**Wa. 注意**

- 配合孔徑公差H5
- 建議以厭氧膠LOC680(參閱化學產品單元)黏著固定
- 壓入配合會導致內徑收縮及變形,影響精度
- 7811之內徑有1個,7812之內徑有2個溝槽可裝內扣環,將滾珠套限制在導套內

 訂貨:  交期:  

7811.015.060

**Ps. 備註**

- AGATHON產品是瑞士進口,缺貨時交期較久,請儘可能提前4週訂貨
- 模座導柱珠套用之有機鉬強力潤滑劑參閱化學產品單元S-00668