





材質	硬度
SUJ2	HRC58

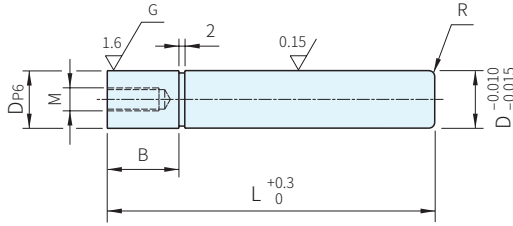

PHSM

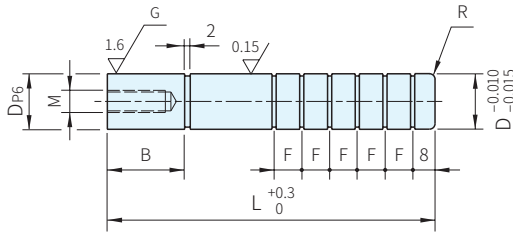

PHUM

D \ L		Groove(溝)……(n)個						
		n						
D	L	40~	50~	70~	80~	90~	160~	180~
8		2	3	4	5	6		
10		2	3	4	5	6		
13		2	3	4	5	6	7	8
16		2	3	4	5	6	7	8
20		2	3	4	5	6	7	8
25		2	3	4	5	6	7	8

※L40~119.5 →F=8  
L120~L(C)max.→F=10

品號 TYPE	D	L								D P6	M	R	B	庫存			
														PHSM	PHUM		
PHSM PHUM	8	40	50	60						8	M5×12	1.0	10	•	•		
					70	80								•	•		
	10	40	50	60	70	80				10			13	•	•		
							90	100						•	•		
	13		50	60	70					13			16	•	•		
						80	90	100						•	•		
	16									16			20	•	•		
			50	60	70	80								•	•		
	20									20			25	•	•		
				60	70	80	90	100						•	•		
	25									25			28	•	•		
					70	80	90	100						•	•		
														110	120	130	140

WA. 注意

- PHSM, PHUM和PHTG, PHTD, PHTY, PHGY……配合使用
- 高速導柱、導套、滾珠套專用之有機鉛強力潤滑劑請參考 S-00668

訂貨：  -  交期：  天 ·  
PHSM8 - 40  天 △