





材質	硬度
SUJ2	HRC58

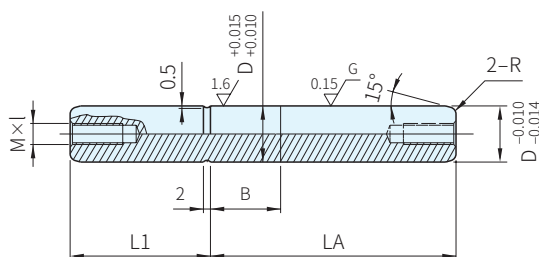

PHSAP

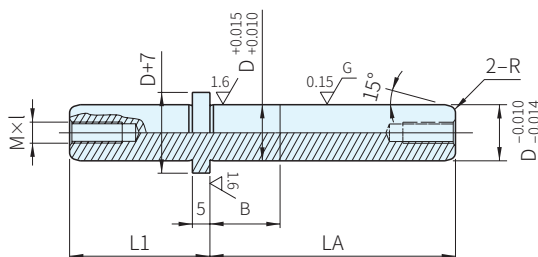

PHSAG

品號		LA	L1 10mm單位	B 1mm單位	R	M×l	庫存			
TYPE	D						PHSAP	PHSAG		
PHSAG	13	60	30~50	10~30	1.5	M5×22		△		
		70	30~60					△		
		80	40~60					△		
PHSAP PHSAG	16	70	30~60		10~30	2	M6×25	△	△	
		80	30~70					△	△	
		90	40~80					△	△	
	20	80	40~70				△	△		
		90	40~70				△	△		
		100	50~80				△	△		
	25	90	90			50~70	10~30	3	M8×25	△
			100	50~80		△				△
			110	60~90		△				△

WA. 注意

- PHSAP, PHSAG和PHTTA, PHTTP, PHTTG, NTPG, NTIG……配合使用
- 高速導柱、導套、滾珠套專用之有機鉛強力潤滑劑請參考 S-00668
- 使用例請參考本單元說明(P.191)

訂貨： - - - 交期： 天

PHSAP16 - 70 - 30 - B20