



PHTTA




PHTTP



PHTTG

材質	硬度
SUJ2	HRC58

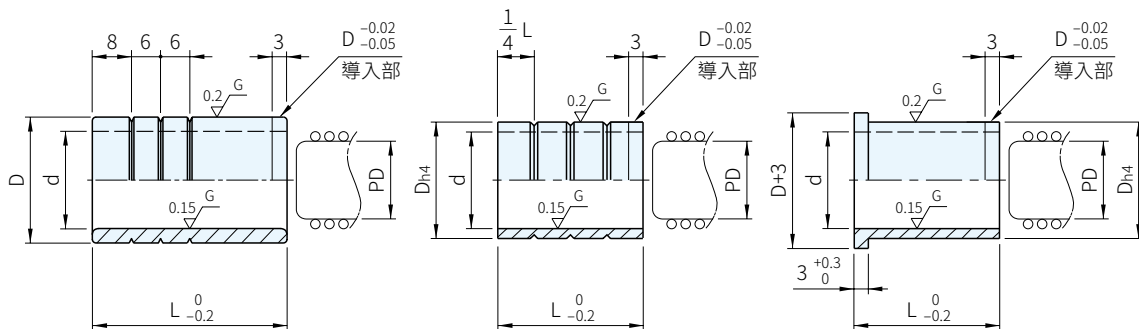

品號		L						d	D		
TYPE	PD	30	35	40	45	50	60				
PHTTA	13	·	·					17	-0.025 -0.030	24	0 -0.005
	16		·	·				20		28	
	20			·	·	△		26		34	
	25					△	△	31		40	

品號		L					d	D		
TYPE	PD	20	25	30	35	40				
PHTTP PHTTG	10	·	·	·			14	-0.025 -0.030	18	0 -0.005
	13	·	·	·			17		22	0 -0.006
	16		·	·	·		20		26	
	20		·	·	·	△	26		31	
	25					△	△		31	37

WA) 注意

- 本產品和PHSAP，PHSAG，NTPG，NTIG……配合使用
- 請優先設計使用庫存品
- 以輕滑配或厭氧膠(LOC680，LOC638)黏著固定
- 高速導柱、導套、滾珠套專用之有機鉬強力潤滑劑請參考 S-00668

訂貨： × 交期： 天 ·
PHTTA16 × 35 天 △