




Type A1




Type A2

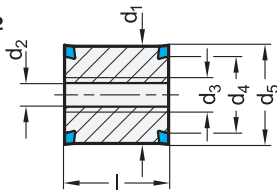


Type A3

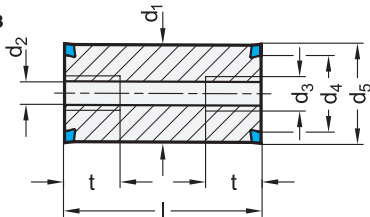

Application examples

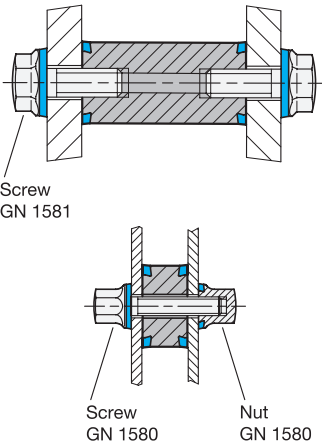

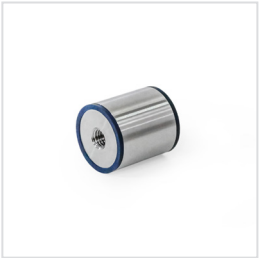

Rostfrei

Inox
Stainless
Steel

HD

3 Type

A1 Through-hole

A2 Through-hole with continuous thread

A3 Through-hole with thread on both sides

1	2				2						
d ₁	Length l ±0,1				Length l ±0,2		d ₂ Through-hole for screw	d ₃ Thread	d ₄	d ₅	t min.
	Type A1		Type A2	Type A3							
22	10	12	16	20	30	50	M 5	M 6	18	22,8	12
28	12	16	20	30	50	75	M 6	M 8	24	28,8	16
34	12	16	20	30	50	100	M 8	M 10	30	34,8	20

Specification

1

2

4

5

Stainless steel AISI 316L

Matte finish (Ra < 0.8 µm)

MT

Sealing ring

H

E

- H-NBR

Temperature resistant -25 °C to +150 °C

- EPDM

Temperature resistant -40 °C to +120 °C

- Blue

- Hardness 85 ±5 Shore A

- FDA compliant

Elastomer Characteristics → Page QVX

Stainless Steel Characteristics → Page QVX

RoHS

Accessory

Sealing Rings GN 7600 → Page QVX

Information

Stainless steel spacers GN 6226 are intended for use in hygienic areas. The sealed mounting surfaces enable fastening without dead spaces. The high quality finish prevents adherence of dirt and facilitates cleaning.

Spacers are used to fasten parts at an offset parallel to their plane of installation. This avoids doubling up on surfaces and leaves space for cleaning. The internal thread can alternatively be used as a through hole by a screw with a smaller thread.

see also...

- Product Family [Hygienic Design](#) → Page QVX
- Stainless Steel Screws [Hygienic Design](#) GN 1580 → Page QVX
- Stainless Steel Nuts [Hygienic Design](#) GN 1580 → Page QVX
- Stainless Steel Screws [Hygienic Design](#) GN 1581 (Low-Profile Head) → Page QVX
- Stainless Steel Screws [Hygienic Design](#) GN 1582 (with Recessed Stud for Loss Protection) → Page QVX

How to order

1

2

3

4

5

GN6226-28-75-A3-MT-H

1 d₁

2 Length l

3 Type

4 Finish

5 Material (sealing ring)

3.2 Mounting, Positioning, Leveling with Screws, Clamping and Supporting Elements |

Page 1