


水平调节脚轮

GDN series

kg 50~1,000kg RoHS °C -10~90°C

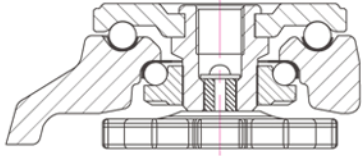

产品说明: 冲压脚轮座(100/120系列: 锻造), 使用强化热处理的双重钢槽旋转结构, 象牙白铝制壳体, 橙色手把或通过扳手调节高度 (120系列: 仅适用扳手调节), NBR 防震底座 (120系列: ABS或 AL) 表面处理: 粉末喷涂, 镀锌

* 4轮允许承载 = 单轮运行承载 × 2

万向型	轮子种类	mm	mm	Kg	mm	mm	mm	mm
GDN-40-S	NYN	42	20	50	71+10	30	M8x1,25P	10
GDN-60-S		50	25	250	82+10	38	M12x1,75P M16x2,0P	18
GDN-80-S		63	28	500	103+15	46	M12x1,75P	16
GDN-100-S		75	30	750	120+12	53	M16x2,0P	24
GD-120-S		75	30	1,000	120+12	53		
GDN-40-S	MCN	40	19	50	71+10	30	M8x1,25P	10
GDN-60-S		49	25	250	82+10	38	M12x1,75P M16x2,0P	18
GDN-80-S		62	28	500	103+15	46	M12x1,75P	16
GDN-100-S		74	30	750	120+12	53	M16x2,0P	24
GD-120-S		74	30	1,000	120+12	53		
GDN-60-S	HUP	50	25	250	82+10	38	M12x1,75P M16x2,0P	18
GDN-80-S		63	28	500	103+15	46	M12x1,75P	16
GDN-100-S		75	30	750	120+12	53	M16x2,0P	24

选项

产品编号	NYN	MCN	HUP	-FBL	-CEN	-CUR
产品特征	尼龙66(D70)	MC尼龙(D80)	浇注型聚氨酯(D70)	黑色壳体	防静电底座	聚氨酯底座
适用型号	40 ~ 120	40 ~ 120	60 ~ 100	40 ~ 120	40 ~ 100	40 ~ 100