
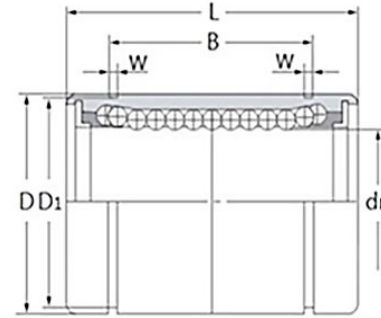


LM-OP系列 直線軸承(開口型)



型號	型式	鋼珠列數	dr (mm)	dr公差 (mm)	D (mm)	D公差 (mm)	L (mm)	L公差 (mm)	B (mm)	B公差 (mm)	W (mm)	D1 (mm)	h ₁ (mm)	θ°	偏心 (mm)	徑向間隙 (mm)	額定動負荷 C (N)	額定靜負荷 Co (N)	重量 (g)
LM8UUOP	開口型	4	8	0 ~ -0.009	15	0 ~ -0.011	24	0 ~ -0.2	17.5	0 ~ -0.2	1.1	14.3	-	-	0.012	-0.005	260	400	12
LM10UUOP	開口型	4	10	0 ~ -0.009	19	0 ~ -0.013	29	0 ~ -0.2	22	0 ~ -0.2	1.3	18	6	80	0.012	-0.005	370	540	23
LM12UUOP	開口型	4	12	0 ~ -0.009	21	0 ~ -0.013	30	0 ~ -0.2	23	0 ~ -0.2	1.3	20	8	80	0.012	-0.005	410	590	25
LM13UUOP	開口型	4	13	0 ~ -0.009	23	0 ~ -0.013	32	0 ~ -0.2	23	0 ~ -0.2	1.3	22	9	80	0.012	-0.007	500	770	34
LM16UUOP	開口型	4	16	0 ~ -0.009	28	0 ~ -0.013	37	0 ~ -0.2	26.5	0 ~ -0.2	1.6	27	11	80	0.015	-0.007	770	1170	52
LM20UUOP	開口型	4	20	0 ~ -0.010	32	0 ~ -0.016	42	0 ~ -0.2	30.5	0 ~ -0.2	1.6	30.5	11	60	0.015	-0.009	860	1370	69
LM25UUOP	開口型	5	25	0 ~ -0.010	40	0 ~ -0.016	59	0 ~ -0.3	41	0 ~ -0.3	1.85	38	12	50	0.015	-0.009	980	1560	188
LM30UUOP	開口型	5	30	0 ~ -0.010	45	0 ~ -0.016	64	0 ~ -0.3	44.5	0 ~ -0.3	1.85	43	15	50	0.015	-0.009	1560	2740	210
LM35UUOP	開口型	6	35	0 ~ -0.012	52	0 ~ -0.019	70	0 ~ -0.3	49.5	0 ~ -0.3	2.1	49	17	50	0.02	-0.013	1660	3130	335
LM40UUOP	開口型	6	40	0 ~ -0.012	60	0 ~ -0.019	80	0 ~ -0.3	60.5	0 ~ -0.3	2.1	57	20	50	0.02	-0.013	2150	4010	500
LM50UUOP	開口型	6	50	0 ~ -0.012	80	0 ~ -0.022	100	0 ~ -0.3	74	0 ~ -0.3	2.6	76.5	25	50	0.02	-0.013	3820	7930	1340
LM60UUOP	開口型	6	60	0 ~ -0.015	90	0 ~ -0.022	110	0 ~ -0.3	85	0 ~ -0.3	3.15	86.5	30	50	0.025	-0.016	4700	9990	1610