


RoHS



Type	皮帶寬度		材質		處理	附屬品 固定螺絲材質
	15.0mm P8M150	25.0mm P8M250	皮帶輪	法蘭		
SBSW	○	○	鋁合金	鋁合金	白陽極	SUS304
SBSF	○	○			硬質陽極	
SBSM	○	○			無電解鍍	
SBSN	○	○	≈S45C	SPCC	染黑	SCM435 (染黑)
SBSS	○	○			無電解鍍	




(Pitch=8.0mm)

攻牙孔尺寸表

(軸孔:P·N)

d H7 軸孔內徑	M 粗螺紋	附屬品 固定螺絲
12	M4	M4
13~17	M5	M5
18~30	M6	M6
31~45	M8	M8
46~67	M10	M10

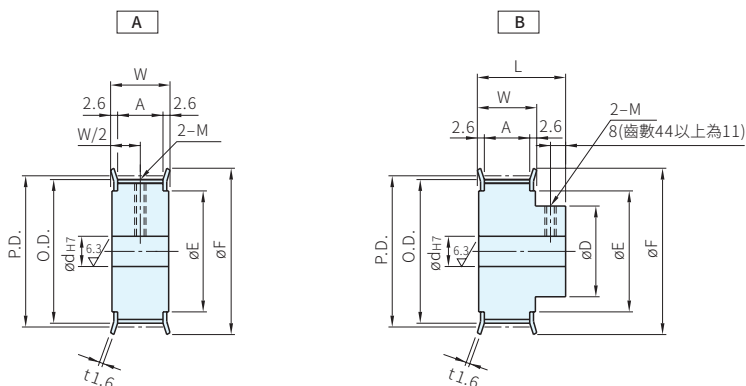

齒數

mm	20	22	24	26	28	30	32	34	36	40	44	48	50
P.D.	50.93	56.02	61.12	66.21	71.30	76.39	81.49	86.58	91.67	101.86	112.05	122.23	127.32
O.D.	49.56	54.65	59.74	64.84	69.93	75.02	80.12	85.21	90.30	100.49	110.67	120.86	125.95
D	36	41	46	51	55	60	65	70	75	85	90	100	100
F	55	61	67	74	80	83	87	95	99	111	119	127	135
E	40	45	50	58	60	63	67	75	80	90	100	105	115

Wa. 注意


· 軸孔規格為P、N時，附攻牙孔和固定螺絲

軸孔規格

· 請從下表選出軸孔規格符號與各尺寸  
· 軸孔內有可能沒有做表面處理


皮帶寬度

mm	No.	
	P8M150	P8M250
A	16.8	27.8
W	22.0	33.0
L 齒數20~40	39.0	50.0
L 齒數44~50	44.0	55.0

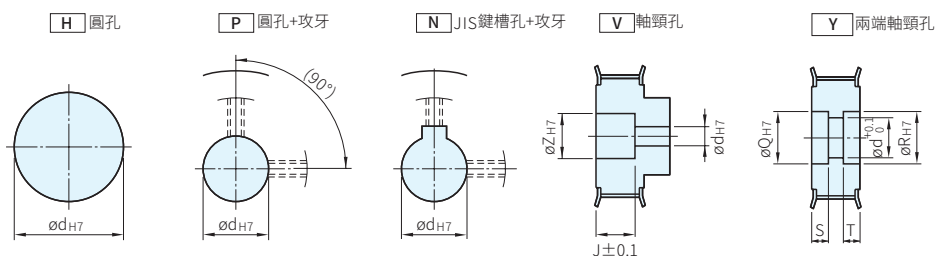

鍵槽尺寸表

軸孔			鍵槽			
規格	軸孔	公差	b	js9	t	公差
N	8	+0.015 0	3	±0.0125	1.4	+0.1 0
N	10	+0.018 0	4	±0.0150	1.8	
N	11~12		5		2.3	
N	13~17		6		2.8	
N	18	+0.021 0	6	±0.0150	+0.2 0	
N	19~22	+0.025 0	8	±0.0180		3.3
N	23~30		10			



型式		皮帶輪 形狀	皮帶輪形狀															
			A						B									
Type	齒數	皮帶 寬度 No.	(~)指定單位1mm						(~)指定單位1mm									
			H	P	N	V		Y		S·T	H	P	N	V				
			d	d	d	d	Z	J 0.1mm	Y	Q·R	S·T 0.1mm	d	d	d	d	Z	J 0.1mm	
(鋁) SBSW SBSF SBSM	20	P8M150	A	12-27	12-27	12-22	12-19	14-23	3.0 ≤ J ≤ W-3.0	12-22	18-26	3~23 S+T ≤ W-3	12-32	12-24	12-22	12-19	14-23	3.0 ≤ J ≤ L-3.0
	22			12-30	12-30	12-25	12-22	14-26		12-25	18-30		12-37	12-29	12-25	12-22	14-26	
	24			12-33	12-33	12-28	12-23	14-28		12-30	18-35		12-42	12-30	12-28	12-23	14-28	
	26			16-35	16-35	16-30	16-25	18-30		16-30	21-40		16-47	16-31	16-30	16-25	18-30	
	28			16-39	16-39	16-34	16-29	18-34		16-30	21-42		16-51	16-35	16-34	16-29	18-34	
(鋼) SBSN SBSS	30	P8M250	B	16-40	16-40	16-35	16-30	18-35	16-35	21-50	16-56	16-40	16-35	16-30	18-35			
	32			16-43	16-43	16-38	16-33	18-37	16-35	21-50	16-61	16-43	16-38	16-33	18-37			
	34			16-47	16-47	16-42	16-35	18-40	16-35	26-55	16-66	16-47	16-42	16-35	18-40			
	36			16-50	16-50	16-45	16-35	18-43	16-38	26-60	16-71	16-50	16-45	16-35	18-43			
	40			20-55	20-55	20-50	20-35	22-45	20-42	27-65	20-80	20-55	20-50	20-35	22-45			
	44			20-60	20-60	20-50	20-35	22-48	20-50	27-72	20-80	20-60	20-50	20-35	22-48			
	48			20-67	20-67	20-50	20-40	22-55	20-50	27-80	20-85	20-67	20-50	20-40	22-55			
50	20-67	20-67	20-50	20-40	22-55	20-50	27-80	20-85	20-67	20-50	20-40	22-55						

訂貨：  -  -  -  -  -  -  -  -  交期:  天

(軸孔規格:H·P·N) SBSW50P8M250 - A - H50

(軸孔規格:V) SBSW48P8M250 - B - V25 - Z43 - J25

(軸孔規格:Y) SBSW36P8M150 - A - Y20 - Q32 - R37 - S7 - T9