




本體		螺絲		優力膠		硬度
材質	處理	材質	處理	材質		
SS400	染黑	SCM435	染黑	WAT-SBU 15 20 25	WAT-LSDN-U 6 8	Shor A90
SUS304	-	SUSXM7	-			

WAT-LSDU

WAT-LSDN-U

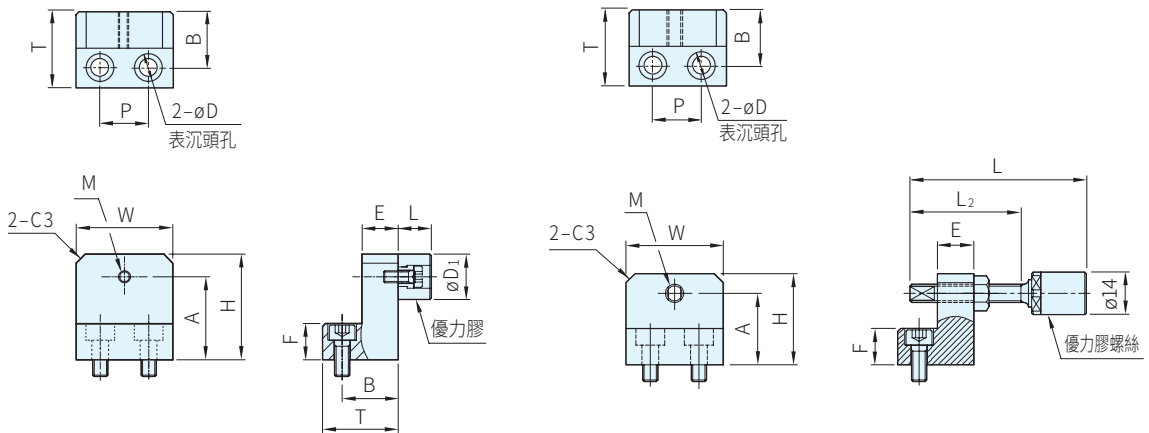

鐵		不銹鋼		線軌 尺寸	對應廠商產品			W	H	A	B	E	F	P	T	M	D	附屬品 螺絲	D ₁	L
品號	庫存	品號	庫存		IKO	NSK	THK													
WAT-LSDU-01	△	WAT-LSDU-01S	△	15	-	-	SRS15M	30	22.5	18	12	12	16	25	M4	5.5	M5×12	15	11	
WAT-LSDU-02	△	WAT-LSDU-02S	△		LWH15	LS15AL	HSR15A	38	30.5											
WAT-LSDU-03	△	WAT-LSDU-03S	△		-	LH15AN	-	45	35.0											
WAT-LSDU-01	△	WAT-LSDU-01S	△	20	-	-	SRS20M	32	30	18	12	12	16	25	M4	5.5	M5×12	15	11	
WAT-LSDU-03	△	WAT-LSDU-03S	△		LWH20	LS20AL · LS20AN	HSR20A	45	35.0											
WAT-LSDU-02	△	WAT-LSDU-02S	△	25	-	-	SRS25M	38	30.5	18	12	12	16	25	M4	6.6	M6×12	20	11	
WAT-LSDU-04	△	WAT-LSDU-04S	△		LWH25	LS25AL · LH25AL	HSR25A	50	40.0											
WAT-LSDU-05	△	WAT-LSDU-05S	△	30	LWH30	LS30AL · LH30AL	HSR30A	38	57	44.5	28	16	16	20	38	M5	9.0	M8×16	25	13
WAT-LSDU-06	△	WAT-LSDU-06S	△	35	LWH35	LS35AL · LH35AL	HSR35A	45	63	50.5	31									

鐵		不銹鋼		線軌 尺寸	對應廠商產品			W	H	A	B	E	F	P	T	M (細牙)	D	附屬品 螺絲	D ₁	L
品號	庫存	品號	庫存		IKO	NSK	THK													
WAT-LSDN-01-U	△	WAT-LSDN-01S-U	△	15	-	-	SRS15M	30	23.5	18	12	12	16	25	M6×P0.75	5.5	M5×12	15	11	
WAT-LSDN-02-U	△	WAT-LSDN-02S-U	△		LWH15	LS15AL	HSR15A	38	31.5											
WAT-LSDN-03-U	△	WAT-LSDN-03S-U	△		-	LH15AN	-	43	35.5											
WAT-LSDN-04-U	△	WAT-LSDN-04S-U	△	20	-	-	SRS20M	32	35	18	12	12	16	25	M8×P1.0	6.6	M6×12	20	11	
WAT-LSDN-05-U	△	WAT-LSDN-05S-U	△		LWH20	LH20AN	HSR20A	43	35.5											
WAT-LSDN-06-U	△	WAT-LSDN-06S-U	△	25	-	-	SRS25M	40	32.5	18	12	12	16	25	M8×P1.0	6.6	M6×12	25	11	
WAT-LSDN-07-U	△	WAT-LSDN-07S-U	△		LWH25	LH25AL	HSR25A	50	43.5											
WAT-LSDN-08-U	△	WAT-LSDN-08S-U	△	30	LWH30	LS30AL · LH30AL	HSR30A	38	57	49.5	28	16	16	20	38	9.0	M8×16	25	13	
WAT-LSDN-09-U	△	WAT-LSDN-09S-U	△		LWH35	LS35AL · LH35AL	HSR35A	45	63	55.5	31									

Ps. 備註

- L, L₂尺寸請參考WAT-SBUH
- 使用在線軌的防脫落和位置定位
- 附優力膠型可消除衝擊音量

Wa. 注意

- 以上產品是本公司自訂規格；記載之對應廠商產品，請貴客戶自行確認

訂貨： 交期： 天
WAT-LSDU-01