




本體		螺絲		優力膠			固定銷
材質	處理	材質	處理	材質		硬度	材質
SS400	染黑	SCM435	染黑	WAT-LSVU 15 20 25	WAT-LSV-N-U WAT-SBUH 6 8	Shor A90	SUJ2
SUS304	-	SUSXM7	-				

WAT-LSVU

WAT-LSV-N-U

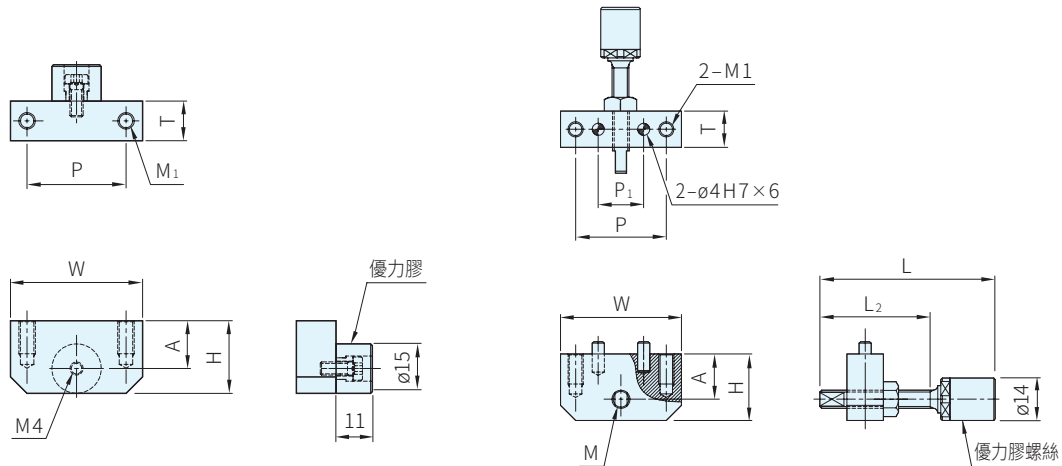

鐵		不銹鋼		線軌尺寸	對應廠商產品			W	H	A	P	T	M1
品號	庫存	品號	庫存		IKO	NSK	THK						
WAT-LSVU-01	△	WAT-LSVU-01S	△	15	-	-	SRS15M	40	15	7.5	30	12	M5×10
WAT-LSVU-02	△	WAT-LSVU-02S	△		LWH15	LS15AL	HSR15A		22	14.5			
WAT-LSVU-03	△	WAT-LSVU-03S	△		-	LH15AN	-		26	18.5			
WAT-LSVU-04	△	WAT-LSVU-04S	△	20	LWH20	LS20AL · LH20AN	HSR20A	50	18	10.5	35	16	M6×12
WAT-LSVU-05	△	WAT-LSVU-05S	△		-	-	SRS20M		23	15.5			
WAT-LSVU-06	△	WAT-LSVU-06S	△	25	-	LS25AL	-	50	31	23.5	35	16	M8×16
WAT-LSVU-07	△	WAT-LSVU-07S	△		LWH25	LH25AL	HSR25A		34	26.5			
WAT-LSVU-08	△	WAT-LSVU-08S	△		LWH30	LS30AL · LH30AL	HSR30A		40	32.5			
WAT-LSVU-09	△	WAT-LSVU-09S	△	35	LWH35	LS35AL · LH35AL	HSR35A	46	38.5				

鐵		不銹鋼		線軌尺寸	對應廠商產品			W	H	A	P	P ₁ ±0.02	T	M (細牙)	M1	附屬品 固定銷
品號	庫存	品號	庫存		IKO	NSK	THK									
WAT-LSV-01N-U	△	WAT-LSV-01SN-U	△	15	LWH15	LS15AL	HSR15A	40	22	15	30	15	12	M6×P0.75	M5×10	4×10
WAT-LSV-02N-U	△	WAT-LSV-02SN-U	△		-	LH15AN	-		26	19						
WAT-LSV-03N-U	△	WAT-LSV-03SN-U	△	20	LWH20	LS20AL · LH20AN	HSR20A	50	18	10	35	16	16	M8×P1.0	M6×12	M8×16
WAT-LSV-04N-U	△	WAT-LSV-04SN-U	△		-	-	SRS20M		23	15						
WAT-LSV-05N-U	△	WAT-LSV-05SN-U	△	25	-	LS25AL	-	50	31	23	35	16	16	M8×P1.0	M6×12	M8×16
WAT-LSV-06N-U	△	WAT-LSV-06SN-U	△		LWH25	LH25AL	HSR25A		34	26						
WAT-LSV-07N-U	△	WAT-LSV-07SN-U	△		LWH30	LS30AL · LH30AL	HSR30A		40	32						
WAT-LSV-08N-U	△	WAT-LSV-08SN-U	△	35	LWH35	LS35AL · LH35AL	HSR35A	46	38							

Ps. 備註

- L, L₂尺寸請參考WAT-SBUH
- 使用在線軌的防脫落和位置定位
- 附優力膠型可消除衝擊音量

Wa. 注意

- 以上產品是本公司自訂規格；記載之對應廠商產品，請貴客戶自行確認

訂貨： 交期： 天

WAT-LSVU-01