


RoHS

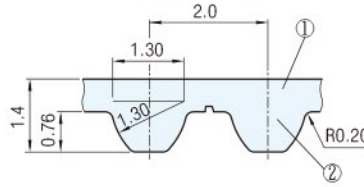

Type	材質	
GBOM	①本體	優力膠

型式		齒數	皮帶周長 (mm)
Type	皮帶No. 皮帶寬度No.		
GBOM (優力膠)	S2M76	40 (4mm)	38 76.0
	S2M78		39 78.0
	S2M80		40 80.0
	S2M90		45 90.0
	S2M92		46 92.0
	S2M100		50 100.0
	S2M102		51 102.0
	S2M106		53 106.0
	S2M110		55 110.0
	S2M112		56 112.0
	S2M114		57 114.0
	S2M116		58 116.0
	S2M120		60 120.0
	S2M122		61 122.0
	S2M126		63 126.0
	S2M128		64 128.0
	S2M138	69 138.0	
	S2M140	70 140.0	
	S2M142	71 142.0	
	S2M144	72 144.0	
	S2M148	74 148.0	
	S2M158	79 158.0	
	S2M160	80 160.0	
	S2M164	82 164.0	
	S2M166	83 166.0	
	S2M170	85 170.0	
	S2M172	86 172.0	
	S2M176	88 176.0	
	S2M180	90 180.0	
	S2M184	92 184.0	
	S2M186	93 186.0	
	S2M190	95 190.0	
S2M200	100 200.0		
S2M206	103 206.0		
S2M214	107 214.0		
S2M218	109 218.0		
S2M220	110 220.0		
S2M224	112 224.0		
S2M230	115 230.0		
S2M234	117 234.0		
S2M236	118 236.0		
S2M238	119 238.0		
S2M240	120 240.0		
S2M250	125 250.0		
S2M256	128 256.0		

型式		齒數	皮帶周長 (mm)
Type	皮帶No. 皮帶寬度No.		
GBOM (優力膠)	S2M258	40 (4mm)	129 258.0
	S2M260		130 260.0
	S2M264		132 264.0
	S2M266		133 266.0
	S2M280		140 280.0
	S2M290		145 290.0
	S2M296		148 296.0
	S2M300		150 300.0
	S2M314		157 314.0
	S2M316		158 316.0
	S2M320		160 320.0
	S2M334		167 334.0
	S2M340		170 340.0
	S2M354		177 354.0
	S2M360		180 360.0
	S2M370		185 370.0
	S2M380	190 380.0	
	S2M396	198 396.0	
	S2M400	200 400.0	
	S2M436	218 436.0	
	S2M440	220 440.0	
	S2M448	224 448.0	
	S2M454	227 454.0	
	S2M460	230 460.0	
	S2M474	237 474.0	
	S2M480	240 480.0	
	S2M488	244 488.0	
	S2M494	247 494.0	
	S2M500	250 500.0	
	S2M504	252 504.0	
	S2M520	260 520.0	
	S2M548	274 548.0	
S2M560	280 560.0		
S2M580	290 580.0		
S2M600	300 600.0		
S2M620	310 620.0		
S2M630	315 630.0		
S2M654	327 654.0		
S2M710	355 710.0		
S2M754	377 754.0		
S2M790	395 790.0		
S2M800	400 800.0		
S2M900	450 900.0		
S2M976	488 976.0		
S2M1000	500 1000.0		

Wa. 注意

- ・使用溫度:橡膠:-30~90℃,優力膠:0~80℃(參考值)
- ・產品示意圖顏色僅供參考,材質會因時間而產生變化
- ・皮帶顏色僅供參考,詢價、訂購時請告知顏色

訂貨: Type - 皮帶No. - 皮帶寬度No. 交期: 3 天
GBOM - S2M76 - 40