
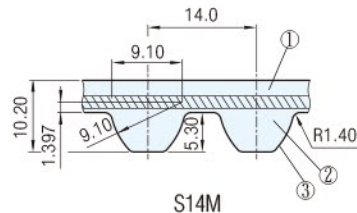


RoHS

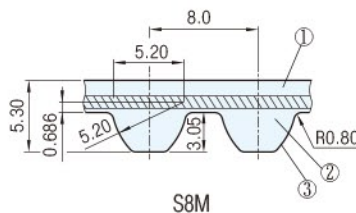

Type	材質	
GBTM	①背面橡膠	CR合成橡膠
	②齒紋橡膠	
	③齒布	

型式		齒數	皮帶周長 (mm)
Type	皮帶No. 皮帶寬度No.		
GBTM (橡膠)	S8M480	150 (15mm)	60 480.0
	S8M520		65 520.0
	S8M560		70 560.0
	S8M584		73 584.0
	S8M600		75 600.0
	S8M632		79 632.0
	S8M640		80 640.0
	S8M680		85 680.0
	S8M712		89 712.0
	S8M720		90 720.0
	S8M728		91 728.0
	S8M760		95 760.0
	S8M800		100 800.0
	S8M840		105 840.0
	S8M848		106 848.0
	S8M880	110 880.0	
	S8M888	111 888.0	
	S8M896	112 896.0	
	S8M920	115 920.0	
	S8M944	118 944.0	
	S8M960	120 960.0	
	S8M984	123 984.0	
	S8M1000	125 1000.0	
	S8M1032	129 1032.0	
	S8M1040	130 1040.0	
	S8M1056	132 1056.0	
	S8M1096	137 1096.0	
	S8M1120	140 1120.0	
	S8M1136	142 1136.0	
	S8M1152	144 1152.0	
	S8M1184	148 1184.0	
	S8M1192	149 1192.0	
	S8M1200	150 1200.0	
	S8M1216	152 1216.0	
	S8M1224	153 1224.0	
	S8M1240	155 1240.0	
	S8M1248	156 1248.0	
	S8M1280	160 1280.0	
	S8M1296	162 1296.0	
	S8M1312	164 1312.0	
S8M1344	168 1344.0		
S8M1352	169 1352.0		
S8M1384	173 1384.0		
S8M1392	174 1392.0		
S8M1400	175 1400.0		
S8M1424	178 1424.0		
S8M1440	180 1440.0		
S8M1600	200 1600.0		
S8M1728	216 1728.0		
S8M1760	220 1760.0		
S8M1776	222 1776.0		
S8M1800	225 1800.0		
S8M2000	250 2000.0		
S8M2120	265 2120.0		
S8M2160	270 2160.0		
S8M2240	280 2240.0		
S8M2304	288 2304.0		
S8M2400	300 2400.0		
S8M2496	312 2496.0		
S8M2560	320 2560.0		
S8M2800	350 2800.0		
S8M2880	360 2880.0		
S8M3200	400 3200.0		
S3M4400	550 4400.0		

型式		齒數	皮帶周長 (mm)
Type	皮帶No. 皮帶寬度No.		
GBTM (橡膠)	S14M1008	400 (40mm)	72 1008.0
	S14M1120		80 1120.0
	S14M1190		85 1190.0
	S14M1246		89 1246.0
	S14M1400		100 1400.0
	S14M1540		110 1540.0
	S14M1610		115 1610.0
	S14M1652		118 1652.0
	S14M1806		129 1806.0
	S14M1890		135 1890.0
	S14M1904		136 1904.0
	S14M2002		143 2002.0
	S14M2100		150 2100.0
	S14M2240		160 2240.0
	S14M2310		165 2310.0
	S14M2380	170 2380.0	
	S14M2450	175 2450.0	
	S14M2506	179 2506.0	
	S14M2590	185 2590.0	
	S14M2660	190 2660.0	
	S14M2800	200 2800.0	
	S14M3150	225 3150.0	
	S14M3500	250 3500.0	
	S14M3556	254 3556.0	
	S14M3850	275 3850.0	
	S14M4004	286 4004.0	
	S14M4060	290 4060.0	
	S14M4326	309 4326.0	
	S14M4508	322 4508.0	
	S14M5012	358 5012.0	

訂貨： Type - 皮帶No. - 皮帶寬度No. 交期： 3 天
 GBTM - S8M480 - 150

注意

- 使用溫度：橡膠：-30~90℃，優力膠：0~80℃（參考值）
- 皮帶顏色僅供參考，詢價、訂購時請告知顏色