


RoHS

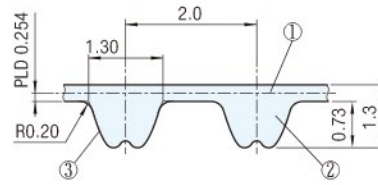

Type	材質	
SBTM	①背面橡膠	CR合成橡膠
	②齒紋橡膠	
	③齒布	

Type	型式		齒數	皮帶周長 (mm)
	皮帶No.	皮帶寬度No.		
SBTM (橡膠)	80P2M	060 (6mm)	40	80
	88P2M		44	88
	98P2M		49	98
	100P2M		50	100
	112P2M		56	112
	116P2M		58	116
	118P2M		59	118
	124P2M		62	124
	126P2M		63	126
	132P2M		66	132
	136P2M		68	136
	140P2M		70	140
	142P2M		71	142
	146P2M		73	146
	152P2M		76	152
	160P2M		80	160
	162P2M		81	162
	166P2M		83	166
	170P2M		85	170
	172P2M		86	172
	176P2M		88	176
	180P2M		90	180
	186P2M		93	186
	190P2M		95	190
	196P2M		98	196
	200P2M		100	200
	208P2M		104	208
	212P2M		106	212
	214P2M		107	214
	216P2M		108	216
	220P2M		110	220
	230P2M		115	230
234P2M	117	234		
236P2M	118	236		
240P2M	120	240		
244P2M	122	244		
246P2M	123	246		
250P2M	125	250		
258P2M	129	258		
262P2M	131	262		
266P2M	133	266		
270P2M	135	270		
280P2M	140	280		
290P2M	145	290		
300P2M	150	300		
302P2M	151	302		
310P2M	155	310		
318P2M	159	318		
320P2M	160	320		

Type	型式		齒數	皮帶周長 (mm)
	皮帶No.	皮帶寬度No.		
SBTM (橡膠)	328P2M	060 (6mm)	164	328
	330P2M		165	330
	340P2M		170	340
	348P2M		174	348
	360P2M		180	360
	370P2M		185	370
	378P2M		189	378
	380P2M		190	380
	390P2M		195	390
	400P2M		200	400
	408P2M		204	408
	416P2M		208	416
	420P2M		210	420
	426P2M		213	426
	440P2M		220	440
	448P2M		224	448
	488P2M		244	488
	490P2M		245	490
	500P2M		250	500
	516P2M		258	516
	520P2M		260	520
	530P2M		265	530
	560P2M		280	560
	576P2M		288	576
	590P2M		295	590
	600P2M		300	600
	630P2M		315	630
	638P2M		319	638
	656P2M		328	656
	676P2M		338	676
	680P2M		340	680
	710P2M		355	710
754P2M	377	754		
764P2M	382	764		
774P2M	387	774		
788P2M	394	788		
800P2M	400	800		
808P2M	404	808		
824P2M	412	824		
846P2M	423	846		
866P2M	433	866		
898P2M	449	898		
900P2M	450	900		
940P2M	470	940		
956P2M	478	956		
992P2M	496	992		
1040P2M	520	1040		
1242P2M	641	1242		

**Wa. 注意**

- ・使用溫度：-25~80℃(參考值)
- ・皮帶顏色僅供參考，詢價、訂購時請告知顏色

訂貨： Type - 皮帶 No. - 皮帶寬度 No. 交期： 8 天

SBTM - 80P2M - 060