



RoHS



P5M

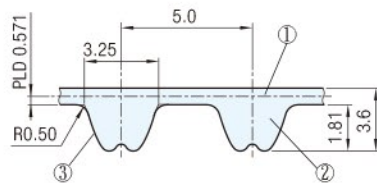

P8M

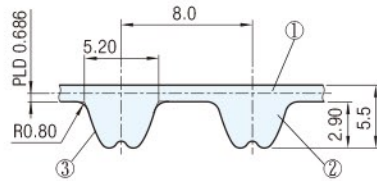

Type	材質	
SBTM	①背面橡膠	CR合成橡膠
	②齒紋橡膠	
	③齒布	

P5M

Type	型 式		齒 數	皮帶周長 (mm)
	皮帶No.	皮帶寬度No.		
SBTM (橡膠)	180P5M	100 (10mm)	36	180.0
	225P5M		45	225.0
	235P5M		47	235.0
	245P5M		49	245.0
	255P5M		51	255.0
	265P5M		53	265.0
	270P5M		54	270.0
	285P5M		57	285.0
	295P5M		59	295.0
	300P5M		60	300.0
	305P5M	61	305.0	
	325P5M	65	325.0	
	345P5M	69	345.0	
	350P5M	70	350.0	
	375P5M	75	375.0	
	400P5M	80	400.0	
	420P5M	84	420.0	
	425P5M	85	425.0	
	450P5M	90	450.0	
	455P5M	91	455.0	
	460P5M	92	460.0	
	465P5M	93	465.0	
	475P5M	95	475.0	
	500P5M	100	500.0	
	535P5M	107	535.0	
	565P5M	113	565.0	
	575P5M	115	575.0	
	580P5M	116	580.0	
	600P5M	120	600.0	
	610P5M	122	610.0	
	635P5M	127	635.0	
	640P5M	128	640.0	
	670P5M	134	670.0	
	675P5M	135	675.0	
	700P5M	140	700.0	
	705P5M	141	705.0	
	710P5M	142	710.0	
	725P5M	145	725.0	
	740P5M	148	740.0	
	755P5M	151	755.0	
	800P5M	160	800.0	
	835P5M	167	835.0	
850P5M	170	850.0		
890P5M	178	890.0		
935P5M	187	935.0		
940P5M	188	940.0		
950P5M	190	950.0		
980P5M	196	980.0		
1000P5M	200	1000.0		
1050P5M	210	1050.0		
1100P5M	220	1100.0		
1125P5M	225	1125.0		
1195P5M	239	1195.0		
1200P5M	240	1200.0		
1240P5M	248	1240.0		
1270P5M	254	1270.0		
		150 (15mm)		

Type	型 式		齒 數	皮帶周長 (mm)
	皮帶No.	皮帶寬度No.		
SBTM (橡膠)	1420P5M	100 (10mm)	284	1420.0
	1595P5M		319	1595.0
	1690P5M		338	1690.0
	1790P5M		358	1790.0
	1800P5M		360	1800.0
	1895P5M	379	1895.0	
	2000P5M	400	2000.0	
	2250P5M	450	2250.0	
	2525P5M	505	2525.0	
			150 (15mm)	

P8M

Type	型 式		齒 數	皮帶周長 (mm)
	皮帶No.	皮帶寬度No.		
SBTM (橡膠)	288P8M	150 (15mm)	36	288.0
	320P8M		40	320.0
	480P8M		60	480.0
	536P8M		67	536.0
	560P8M		70	560.0
	600P8M		75	600.0
	632P8M		79	632.0
	640P8M		80	640.0
	680P8M		85	680.0
	720P8M		90	720.0
	800P8M	100	800.0	
	840P8M	105	840.0	
	880P8M	110	880.0	
	920P8M	115	920.0	
	960P8M	120	960.0	
	1040P8M	130	1040.0	
	1080P8M	135	1080.0	
	1120P8M	140	1120.0	
	1200P8M	150	1200.0	
	1224P8M	153	1224.0	
	1280P8M	160	1280.0	
	1352P8M	169	1352.0	
	1440P8M	180	1440.0	
	1464P8M	183	1464.0	
	1600P8M	200	1600.0	
	1760P8M	220	1760.0	
	1800P8M	225	1800.0	
	2000P8M	250	2000.0	
	2200P8M	275	2200.0	
	2400P8M	300	2400.0	
	2600P8M	325	2600.0	
	2800P8M	350	2800.0	
3048P8M	381	3048.0		
3280P8M	410	3280.0		
3600P8M	450	3600.0		
4400P8M	550	4400.0		
		250 (25mm)		

訂貨： Type - 皮帶 No. - 皮帶寬度 No. 交期： 3 天

SBTM - 255P5M - 100

Wa 注意

- 使用溫度：-25~80°C (參考值)
- 皮帶顏色僅供參考，詢價、訂購時請告知顏色