
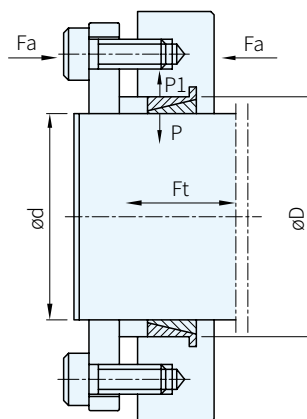


RoHS



材質

S45C

品號	庫存	d	D	L	L1	軸向壓力 Fa(KN)	軸向推力 Ft(KN)	傳達扭矩 Mt(Nm)	軸面壓力 P(N/mm ²)	穀面壓力 P1(N/mm ²)	
SC-08	△	8	11	4.5	3.7	9.1	1.09	4.3	98	72	
SC-10	△	10	13			12.1	1.37	6.9		75	
SC-12	△	12	15			12.4	1.64	9.8		78	
SC-13	△	13	16			12.7	1.8	12		79	
SC-14	△	14	18	6.3	5.3	20.4	2.74	19.2		76	
SC-15	△	15	19			23.5	2.94	22.1		77	
SC-16	△	16	20			23.9	3.14	25.1		78	
SC-17	△	17	21			24.2	3.33	28.3		79	
SC-18	△	18	22			24.8	3.53	31.8		80	
SC-19	△	19	24			29.1	3.72	35.3		77	
SC-20	△	20	25			29.5	3.92	39.2		78	
SC-22	△	22	26			28.3	4.31	47.0		83	
SC-24	△	24	28			29.4	4.7	56.8		84	
SC-25	△	25	30			31.8	4.9	60.8		81	
SC-28	△	28	32	31.9	5.49	76.4	86				
SC-30	△	30	35	34.8	5.88	88.2	84				
SC-32	△	32	36	35.9	6.27	100	87				
SC-35	△	35	40	7	6	44.8	7.74	136		86	
SC-36	△	36	42			47.3	7.94	144		84	
SC-38	△	38	44			48.8	8.43	160			
SC-40	△	40	45	8	6.6	57.6	9.75	195		87	
SC-42	△	42	48			61.4	10.3	216		86	
SC-45	△	45	52	10	8.6	90.3	14.3	321		85	
SC-48	△	48	55			92.7	15.3	367			
SC-50	△	50	57			94.7	15.9	397			86
SC-55	△	55	62			99.7	17.4	480			87
SC-56	△	56	64	12	10.4	125.6	21.6	603		86	
SC-60	△	60	68			130.9	23.0	692			
SC-63	△	63	71			134.6	24.2	764			
SC-65	△	65	73	134.9	25.0	813	87				
SC-70	△	70	79	172.4	31.6	1110					
SC-71	△	71	80	174.0	32.0	1140					
SC-75	△	75	84	185.7	33.8	1260					
SC-80	△	80	91	17	15	247.1	44.1	1770		86	
SC-90	△	90	101			266.2	50.0	2240		87	
SC-100	△	100	114			21	18.7	370.8		69.6	3450

Ps. 備註

- 非自動校對
- 可幾個串聯增加傳達扭矩

訂貨：品號 交期：14 天

SC-08