


RoHS

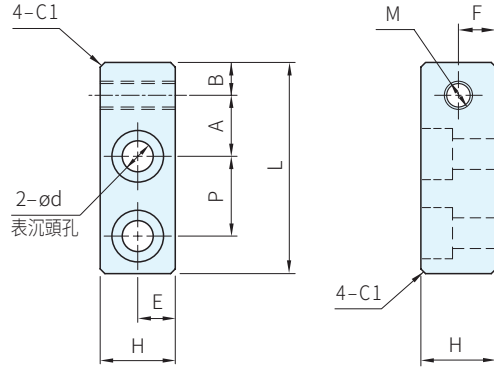

材質	處理
SS400	染黑
SUS304	-

鐵品號	庫存	不銹鋼品號	庫存	M×P	L	H	A	P	E	F	B	d
WAT-BPC04N10Z	△	WAT-BPC04N10S	△	M4 × 0.7	33	12	10	12	6	6	5	4.5(M4用)
WAT-BPC05N12Z	△	WAT-BPC05N12S	△	M5 × 0.8	40	14	12	15	7	7	6	5.5(M5用)
WAT-BPC06N13Z	△	WAT-BPC06N13S	△	M6 × 1	45	16	13	17	8	8	7	6.6(M6用)
WAT-BPC08N17Z	△	-	-	M8 × 1.25	57	22	17	22	11	11	8	9(M8用)
WAT-BPC10N22Z	△			M10 × 1.5	69	26	22	25	12	12	10	11(M10用)



Ps. 備註

· 亦可使用在張力調整器

訂貨： 交期： 天

WAT-BPC04N10Z

Ex. 使用例

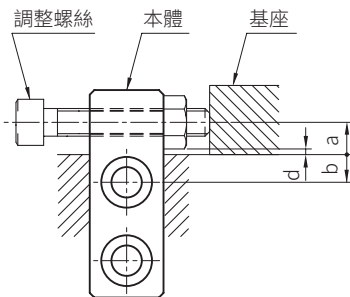

· 螺絲、螺帽需個別購買

調整螺絲	寸法(mm)		
	a	b	d
M4	5	5	1
M5	6	6	1.4
M6	7		1.2
M8	9	8	1.5
M10	12	10	2.2

d：螺帽和本體上面的最小間隙