


聚胺酯配管



TU 系列

■配管尺寸：公制尺寸

型號表示方法^{註1)}

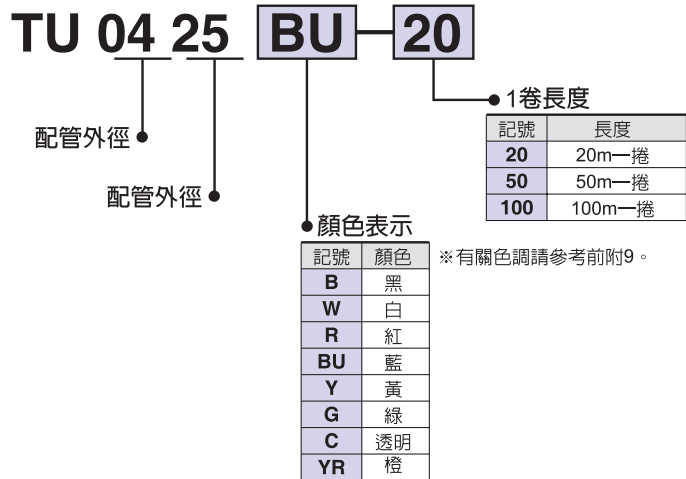

破壞壓力特性曲線及使用壓力

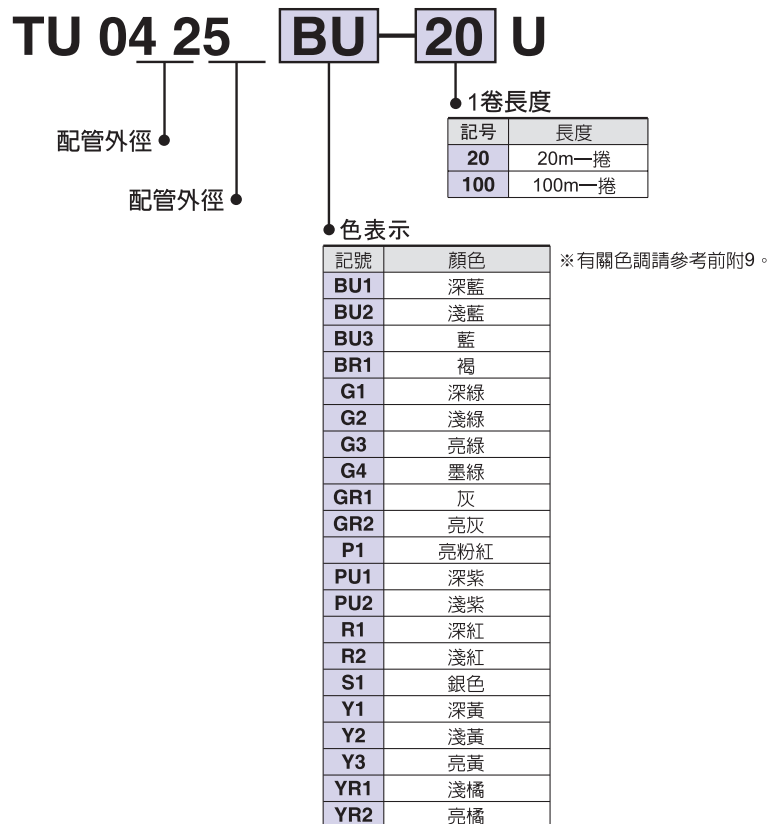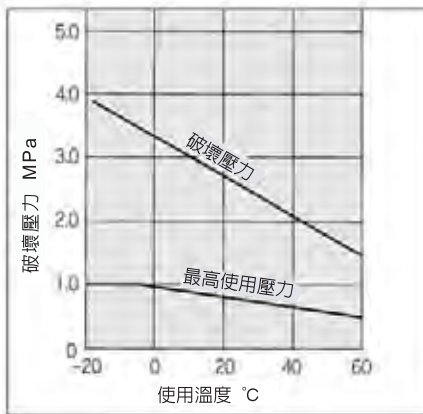

規格

	TU0212	TIUB01	TU0425	TU0604	TU0805	TU1065	TU1208	TU1610
使用流體	空氣、水							
最高使用壓力(20°C時)	0.8MPa							
破壞壓力	請參考破壞壓力特性曲線圖。							
最小彎曲半徑mm	4	10	10	15	20	27	35	45
使用溫度	-20~60°C、水：0~40°C(無結冰)							
材質	聚胺酯							

註1) 依照配管尺寸適用配管的顏色、1卷長度而有所不同。
詳細請參考下一頁。

註2) TIUB01的配管尺寸為外徑3.2、內徑2。

● -20m一捲 -50m一捲 □ -100m一捲

名稱	配管尺寸							
	公制尺寸							
	TU0212	TIUB01	TU0425	TU0604	TU0805	TU1065	TU1208	TU1610
外徑 mm	2	3.2	4	6	8	10	12	16
內徑 mm	1.2	2	2.5	4	5	6.5	8	10
黑(B)	●	●	●	●	●	●	●	▲
白(W)	●	●	●	●	●	●	●	▲
紅(R)	●	●	●	●	●	●	●	▲
藍(BU)	●	●	●	●	●	●	●	▲
黃(Y)	●	●	●	●	●	●	●	▲
綠(G)	●	●	●	●	●	●	●	▲
透明(C)	●	●	●	●	●	●	●	▲
橙(YR)		●	●	●	●	●	●	
深藍-(BU1)		●	●	●	●	●	●	
淺藍-(BU2)		●	●	●	●	●	●	
藍-(BU3)		●	●	●	●	●	●	
褐(BR1)		●	●	●	●	●	●	
深綠-(G1)		●	●	●	●	●	●	
淺綠-(G2)		●	●	●	●	●	●	
亮綠-(G3)		●	●	●	●	●	●	
墨綠色-(G4)		●	●	●	●	●	●	
灰-(GR1)		●	●	●	●	●	●	
亮灰-(GR2)		●	●	●	●	●	●	
亮粉紅(P1)		●	●	●	●	●	●	
深紫(PU1)		●	●	●	●	●	●	
淺紫(PU2)		●	●	●	●	●	●	
深紅(R1)		●	●	●	●	●	●	
淺紅(R2)		●	●	●	●	●	●	
銀(S1)		●	●	●	●	●	●	
深黃(Y1)		●	●	●	●	●	●	
淺黃(Y2)		●	●	●	●	●	●	
亮黃(Y3)		●	●	●	●	●	●	
淺橘(YR1)		●	●	●	●	●	●	
亮橘(YR2)		●	●	●	●	●	●	

TU

TUS

T

TS

TUH

TCU

TFU

TPH

TPS

TL/TIL

TH

TAU

TAS

TRS

TRBU

TRB

相關機器



接單生產

一捲 X3

外徑	內徑	型號	1捲長度(m)
3.2	2	TIUB01 顏色記號 -100-X3	100
4	2.5	TU0425 顏色記號 -100-X3	100
		TU0425 顏色記號 -500-X3	500
6	4	TU0604 顏色記號 -100-X3	100
		TU0604 顏色記號 -400-X3	400
8	5	TU0805 顏色記號 -100-X3	100
		TU0805 顏色記號 -200-X3	200
10	6.5	TU1065 顏色記號 -100-X3	100
12	8	TU1208 顏色記號 -100-X3	100

顏色記號-B(黑)、W(白)、R(紅)、BU(藍)、Y(黃)、G(綠)、C(透明)、YR(橙)

無塵系列 10-

外徑	內徑	型號
2	1.2	10-TU0212 顏色記號 -20
3.2	2	10-TIUB01 顏色記號 -20
4	2.5	10-TU0425 顏色記號 -20
6	4	10-TU0604 顏色記號 -20
8	5	10-TU0805 顏色記號 -20
10	6.5	10-TU1065 顏色記號 -20
12	8	10-TU1208 顏色記號 -20

顏色記號-B(黑)、W(白)、R(紅)、BU(藍)、Y(黃)、G(綠)、C(透明)、YR(橙)但是YR(橙) ø2除外