




材質	處理
S45C	高週波熱處理

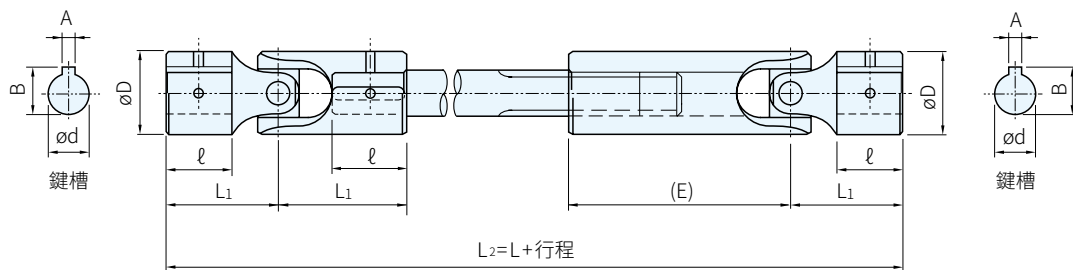

TYPE	d	D	L ₁	ℓ	(E)	鍵槽 A×B JS9	S	扭力 (kgf-m)	靜荷載 (kgf-m)	閉總長 L min.~max. (指定單位1mm)	行程 mm	開總長 L ₂
LS-10	10	20	34	24	65	3×11.8	65	3.0	7.5	167~345	+30	閉總長L+行程
LS-12	12	24	42	29	80	4×13.8	75	4.5	12.0	206~385	+35	
LS-14	14	28	47	32	90	5×16.3	80	7.0	17.0	231~440	+40	
LS-16	16	32	52	35	100	5×18.3	90	10.0	25.0	256~480		
LS-18	18	36	60	39	110	5×20.3	100	13.0	32.0	290~560	+50	
LS-20	20	40	62	40	115	6×22.8		18.0	45.0	301~575		
LS-22	22	44	65	42	120	6×24.8	105	24.0	60.0	315~615	+60	
LS-25	25	50	70	43	125	8×28.3	115	30.0	80.0	335~675		
LS-30	30	60	89	54	155	8×33.3	130	45.0	115.0	422~780	+75	
LS-35	35	70	100	58	175	10×38.3	150	55.0	180.0	475~970		
LS-40	40	80	114	67	190	12×43.3	160	85.0	250.0	532~1105	+90	
LS-45	45	90	125	74	200	14×48.8	170	125.0	350.0	575~1225		
LS-50	50	100	135	80	210	14×53.8		180.0	490.0	615~1295	+110	
LS-60	60	120	150	85	230	18×64.4	185	280.0	650.0	680~1415		
LS-70	70	135	160	92	250	20×74.9	200	450.0	1200.0	730~1745		

備註

· (E)尺寸會隨"閉總長L"而變化。上表之(E)尺寸為"最小閉總長L"時的數據

訂貨： TYPE - 閉總長L 交期： 8 天

LS-10 - 167