

CABLE

High-modulus polyethylene (HMWPE), black.

STANDARD EXECUTIONS

AlSI 304 stainless steel fixing plate.

NERINOX treated stainless steel ring with two coils.


- **CV-T-2A**: cable with two clamping rings.
- **CV-T-A-P**: cable with one ring and one clamping plate.
- **CV-T-2P**: cable with two clamping plates.
- **CV-T**: cable without rings and without plates.
- **CV-T-P**: cable without rings and with one plates.

FEATURES AND APPLICATIONS


CV-T cables are light yet remarkably tough.

They are mainly used in combination with the different types of self-locking pins or in cases where you want to make small components or tools unmissable so that they are always available and at hand.


In particular, they can be used in place of the CT-S ball chain, when a particular tear resistance is required.



CV-T-2A

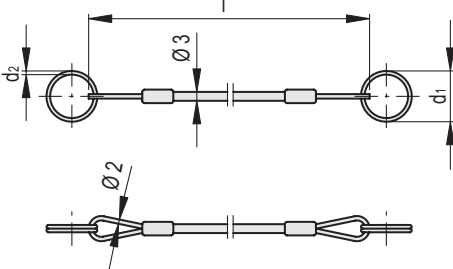

CV-T-A-P

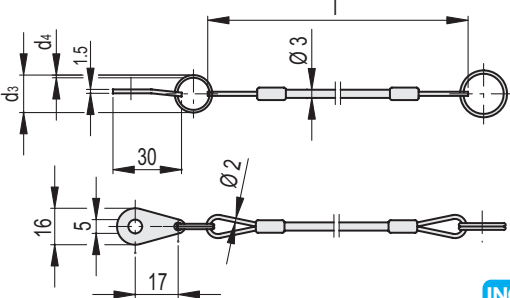



CV-T-2A

| Code  | Description    | d1 | d2  | l   | Max. static load<br>[N] | ⚖  |
|-------|----------------|----|-----|-----|-------------------------|----|
| 76201 | CV-T-2A-18-150 | 18 | 1.3 | 150 | 160                     | 7  |
| 76202 | CV-T-2A-24-150 | 24 | 1.5 | 150 | 160                     | 8  |
| 76203 | CV-T-2A-30-150 | 30 | 1.8 | 150 | 180                     | 9  |
| 76206 | CV-T-2A-18-200 | 18 | 1.3 | 200 | 160                     | 9  |
| 76207 | CV-T-2A-24-200 | 24 | 1.5 | 200 | 160                     | 10 |
| 76208 | CV-T-2A-30-200 | 30 | 1.8 | 200 | 180                     | 11 |
| 76211 | CV-T-2A-18-320 | 18 | 1.3 | 320 | 160                     | 13 |
| 76212 | CV-T-2A-24-320 | 24 | 1.5 | 320 | 160                     | 14 |
| 76213 | CV-T-2A-30-320 | 30 | 1.8 | 320 | 180                     | 15 |
| 76216 | CV-T-2A-18-500 | 18 | 1.3 | 500 | 160                     | 18 |
| 76217 | CV-T-2A-24-500 | 24 | 1.5 | 500 | 160                     | 19 |
| 76218 | CV-T-2A-30-500 | 30 | 1.8 | 500 | 180                     | 20 |

CV-T-A-P

| Code  | Description     | d1 | d2  | d3 | d4  | l   | Max. static load<br>[N] | ⚖  |
|-------|-----------------|----|-----|----|-----|-----|-------------------------|----|
| 76221 | CV-T-A-P-18-150 | 18 | 1.3 | 18 | 1.3 | 150 | 160                     | 8  |
| 76222 | CV-T-A-P-24-150 | 24 | 1.5 | 18 | 1.3 | 150 | 160                     | 9  |
| 76223 | CV-T-A-P-30-150 | 30 | 1.8 | 18 | 1.3 | 150 | 180                     | 10 |
| 76226 | CV-T-A-P-18-200 | 18 | 1.3 | 18 | 1.3 | 200 | 160                     | 10 |
| 76227 | CV-T-A-P-24-200 | 24 | 1.5 | 18 | 1.3 | 200 | 160                     | 11 |
| 76228 | CV-T-A-P-30-200 | 30 | 1.8 | 18 | 1.3 | 200 | 180                     | 12 |
| 76231 | CV-T-A-P-18-320 | 18 | 1.3 | 18 | 1.3 | 320 | 160                     | 14 |
| 76232 | CV-T-A-P-24-320 | 24 | 1.5 | 18 | 1.3 | 320 | 160                     | 15 |
| 76233 | CV-T-A-P-30-320 | 30 | 1.8 | 18 | 1.3 | 320 | 180                     | 16 |
| 76236 | CV-T-A-P-18-500 | 18 | 1.3 | 18 | 1.3 | 500 | 160                     | 19 |
| 76237 | CV-T-A-P-24-500 | 24 | 1.5 | 18 | 1.3 | 500 | 160                     | 20 |
| 76238 | CV-T-A-P-30-500 | 30 | 1.8 | 18 | 1.3 | 500 | 180                     | 21 |

INOX STAINLESS STEEL

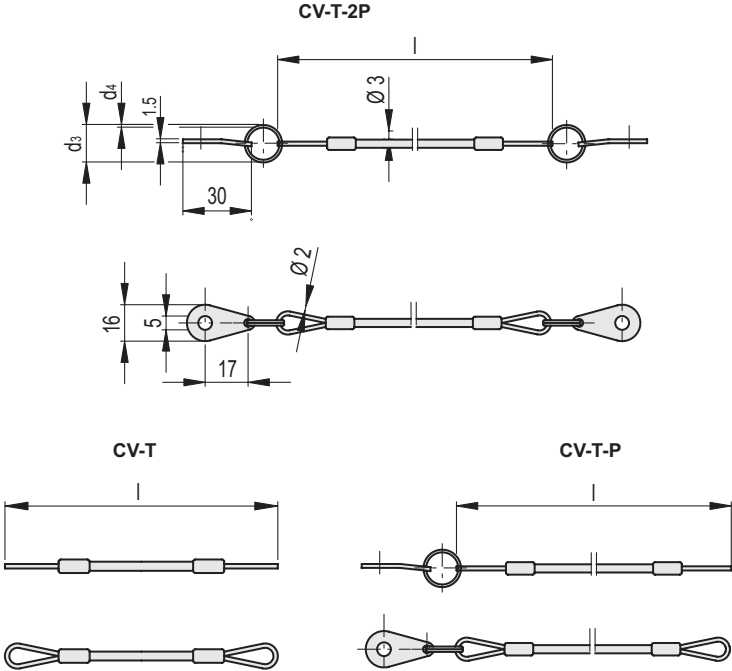

CV-T-2P

INOX STAINLESS STEEL

| Code  | Description | d3 | d4  | l   | Max. static load [N] | ⚖  |
|-------|-------------|----|-----|-----|----------------------|----|
| 76241 | CV-T-2P-150 | 18 | 1.3 | 150 | 160                  | 12 |
| 76246 | CV-T-2P-200 | 18 | 1.3 | 200 | 160                  | 14 |
| 76251 | CV-T-2P-320 | 18 | 1.3 | 320 | 160                  | 18 |
| 76256 | CV-T-2P-500 | 18 | 1.3 | 500 | 160                  | 23 |

CV-T

| Code  | Description | l   | Max. static load [N] | ⚖ |
|-------|-------------|-----|----------------------|---|
| 76915 | CV-T-150    | 150 | 300                  | 2 |
| 76920 | CV-T-200    | 200 | 300                  | 2 |
| 76932 | CV-T-320    | 320 | 300                  | 3 |
| 76950 | CV-T-500    | 500 | 300                  | 5 |

CV-T-P

INOX STAINLESS STEEL

| Code  | Description | d3 | d4  | l   | Max. static load [N] | ⚖  |
|-------|-------------|----|-----|-----|----------------------|----|
| 76261 | CV-T-P-150  | 18 | 1.3 | 150 | 160                  | 7  |
| 76266 | CV-T-P-200  | 18 | 1.3 | 200 | 160                  | 9  |
| 76271 | CV-T-P-320  | 18 | 1.3 | 320 | 150                  | 12 |
| 76276 | CV-T-P-500  | 18 | 1.3 | 500 | 150                  | 15 |