


RoHS

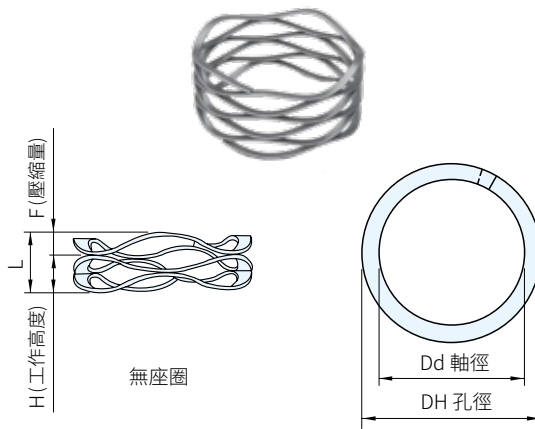

材質
AISI 1070~1090

品 號		DH	Dd	L	定 數	H	F	荷 重
Type	NO	孔 徑	軸 徑	自由長		工作高度	壓縮量	
Type	NO	mm	mm	mm	N/mm	mm	mm	N
SPIM	0901	9.5	6.4	4.0	18.4	2.4	1.6	29.4
	0902			5.0	14.0	2.9	2.1	
	0903			7.0	10.9	4.3	2.7	
	0904			8.0	9.2	4.8	3.2	
	0905			9.0	7.9	5.3	3.7	
	0906			10.0	6.8	5.7	4.3	
	0907			12.0	6.1	7.2	4.8	
	0908			13.0	5.6	7.7	5.3	
	0909			14.0	5.0	8.1	5.9	
SPIM	1101	11.0	7.2	4.0	16.8	1.9	2.1	35.4
	1102			5.5	13.1	2.8	2.7	
	1103			7.0	10.4	3.6	3.4	
	1104			8.5	9.3	4.7	3.8	
	1105			10.0	7.5	5.3	4.7	
	1106			11.0	6.7	5.7	5.3	
	1107			12.5	5.8	6.4	6.1	
	1108			14.0	5.4	7.5	6.5	
	1109			15.5	4.9	8.3	7.2	
SPIM	1201	12.7	8.0	4.4	15.8	1.6	2.8	44.1
	1202			6.0	11.9	2.3	3.7	
	1203			7.5	9.4	2.8	4.7	
	1204			9.0	8.2	3.6	5.4	
	1205			10.5	6.8	4.0	6.0	
	1206			12.0	6.1	4.8	7.2	
	1207			14.0	5.3	5.6	8.4	
	1208			15.0	4.9	6.0	9.0	
	1209			17.0	4.4	6.9	10.1	
SPIM	1401	14.3	9.5	5.0	17.6	2.2	2.8	49.0
	1402			7.0	14.0	3.5	3.5	
	1403			9.0	10.7	4.4	4.6	
	1404			10.0	9.4	4.8	5.2	
	1405			12.0	7.9	5.8	6.2	
	1406			13.0	7.2	6.2	6.8	
	1407			15.0	6.1	7.0	8.0	
	1408			17.0	5.8	8.5	8.5	
	1409			18.0	5.3	8.7	9.3	
SPIM	1601	15.9	11.4	5.0	28.4	3.1	1.9	53.9
	1602			6.0	20.7	3.4	2.6	
	1603			8.0	16.8	4.8	3.2	
	1604			9.0	13.8	5.1	3.9	
	1605			11.0	12.0	6.5	4.5	
	1606			14.0	9.5	8.3	5.7	
	1607			17.0	7.7	10.0	7.0	
	1608			20.0	6.5	11.7	8.3	


品 號		DH	Dd	L	定 數	H	F	荷 重
Type	NO	孔 徑	軸 徑	自由長		工作高度	壓縮量	
Type	NO	mm	mm	mm	N/mm	mm	mm	N
SPIM	1901	19.0	14.0	7.0	25.6	4.7	2.3	58.8
	1902			9.0	17.3	5.6	3.4	
	1903			11.0	15.5	7.2	3.8	
	1904			13.0	12.2	8.2	4.8	
	1905			15.0	11.3	9.8	5.2	
	1906			19.0	8.8	12.3	6.7	
	1907			26.0	6.5	16.9	9.1	
SPIH	1901	19.0	14.0	6.8	51.6	4.9	1.9	98.0
	1902			9.6	37.7	7.0	2.6	
	1903			11.0	30.6	7.8	3.2	
	1904			12.6	25.8	8.8	3.8	
	1905			15.0	21.8	10.5	4.5	
	1906			19.0	17.2	13.3	5.7	
	1907			26.0	12.7	18.3	7.7	
SPIM	2201	22.2	15.3	7.4	23.1	4.8	2.6	78.4
	2202			9.0	19.1	5.9	3.1	
	2203			10.8	16.3	7.4	3.4	
	2204			13.0	13.3	8.6	4.4	
	2205			15.0	11.5	10.2	4.8	
	2206			19.0	8.7	12.8	6.2	
	2207			25.2	7.1	17.7	7.5	
SPIH	2201	22.2	15.3	7.4	43.4	4.8	2.6	112.7
	2202			9.0	36.4	5.9	3.1	
	2203			11.0	31.3	7.4	3.6	
	2204			13.0	25.6	8.6	4.4	
	2205			15.0	23.5	10.2	4.8	
	2206			19.0	18.2	12.8	6.2	
	2207			26.0	13.6	17.7	8.3	
SPIM	2501	25.4	18.6	7.0	19.1	2.9	4.1	78.4
	2502			8.9	14.5	3.5	5.4	
	2503			11.0	11.7	4.3	6.7	
	2504			13.0	9.7	4.9	8.1	
	2505			15.0	8.6	5.9	9.1	
	2506			20.0	6.6	8.2	11.8	
	2507			26.0	4.9	10.0	16.0	
	2508			32.0	4.0	12.5	19.5	
	2509			38.0	3.3	14.4	23.6	
	2510			45.0	2.8	17.0	28.0	
	2511			50.0	2.4	18.0	32.0	
SPIH	2501	25.4	18.6	6.8	38.8	3.9	2.9	112.7
	2502			8.9	28.2	4.9	4.0	
	2503			11.0	23.0	6.1	4.9	
	2504			13.0	18.8	7.0	6.0	
	2505			15.0	16.6	8.2	6.8	
	2506			19.2	12.5	10.2	9.0	
	2507			26.0	9.5	14.1	11.9	
	2508			32.0	7.9	17.7	14.3	
	2509			38.0	6.3	20.1	17.9	
	2510			45.6	5.4	24.9	20.7	
	2511			50.0	4.7	26.2	23.8	

PS 備註

- 荷重(N)=定數(N/mm)×壓縮量(mm)
- 壓縮量=L(自由長 mm)－H(工作高度 mm)
- 1N=0.101972 kgf

訂貨： - 交期：

SPIM - 0901

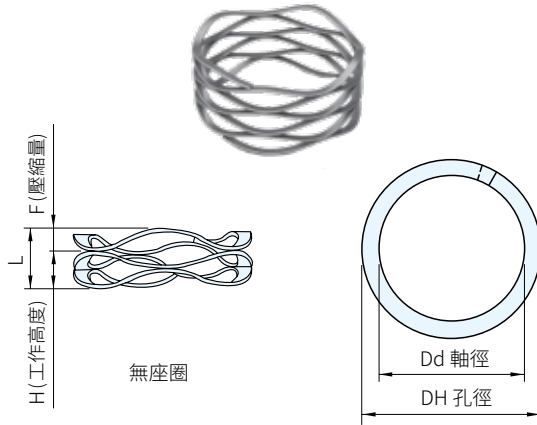

材質
AISI 1070~1090

品號		DH	Dd	L	定數	H	F	荷重
Type	NO	孔徑	軸徑	自由長	N/mm	工作高度	壓縮量	
		mm	mm	mm		mm	mm	N
SPIM	2801	28.6	21.6	8.0	25.2	4.5	3.5	88.2
	2802			9.6	19.2	5.0	4.6	
	2803			13.0	15.6	7.2	5.8	
	2804			14.9	12.6	7.9	7.0	
	2805			18.0	11.0	10.0	8.0	
	2806			20.0	9.5	10.7	9.3	
	2807			26.0	7.7	14.5	11.5	
	2808			33.0	6.0	18.2	14.8	
	2809			40.0	4.7	21.3	18.7	
	2810			50.0	3.9	27.1	22.9	
SPIH	2801	28.6	21.6	8.0	42.7	4.9	3.1	132.3
	2802			9.9	31.5	5.7	4.2	
	2803			13.0	26.5	8.0	5.0	
	2804			15.0	21.0	8.7	6.3	
	2805			18.0	18.9	11.0	7.0	
	2806			20.0	15.9	11.7	8.3	
	2807			26.0	13.0	15.8	10.2	
	2808			33.0	10.2	20.0	13.0	
	2809			40.0	8.2	23.9	16.1	
	2810			50.1	6.6	30.1	20.0	
SPIM	3101	31.8	25.4	8.0	20.1	3.6	4.4	88.2
	3102			10.0	15.0	4.1	5.9	
	3103			13.0	12.2	5.8	7.2	
	3104			15.0	10.1	6.3	8.7	
	3105			18.0	8.7	7.9	10.1	
	3106			20.0	7.7	8.6	11.4	
	3107			26.0	6.1	11.6	14.4	
	3108			33.6	4.7	15.0	18.6	
	3109			40.0	3.9	17.1	22.9	
	3110			50.7	3.1	22.0	28.7	
SPIH	3101	31.8	25.4	7.8	38.9	4.4	3.4	132.3
	3102			9.8	28.8	5.2	4.6	
	3103			13.0	23.2	7.3	5.7	
	3104			14.8	19.2	7.9	6.9	
	3105			18.0	16.5	10.0	8.0	
	3106			20.0	14.4	10.8	9.2	
	3107			26.0	11.4	14.4	11.6	
	3108			33.0	8.9	18.2	14.8	
	3109			40.0	7.3	22.0	18.0	
	3110			50.0	5.8	27.1	22.9	

品 號		DH	Dd	L	定 數	H	F	荷 重
Type	NO	孔 徑	軸 徑	自由長		工作高度	壓 縮 量	
Type	NO	mm	mm	mm	N/mm	mm	mm	N
SPIM	3501	34.9	26.2	8.0	27.5	3.9	4.1	112.7
	3502			10.0	20.5	4.5	5.5	
	3503			13.0	16.8	6.3	6.7	
	3504			15.0	13.6	6.7	8.3	
	3505			18.0	12.1	8.7	9.3	
	3506			20.0	10.5	9.3	10.7	
	3507			26.0	8.6	12.9	13.1	
	3508			33.0	6.5	15.6	17.4	
	3509			40.7	5.2	19.2	21.5	
	3510			51.2	4.2	24.3	26.9	
SPIH	3501	34.9	26.2	8.0	40.2	4.1	3.9	156.8
	3502			10.0	29.0	4.6	5.4	
	3503			13.0	24.1	6.5	6.5	
	3504			15.0	19.6	7.0	8.0	
	3505			18.0	17.2	8.9	9.1	
	3506			20.0	14.9	9.5	10.5	
	3507			26.0	12.1	13.0	13.0	
	3508			33.0	9.4	16.4	16.6	
	3509			40.0	7.5	19.2	20.8	
	3510			50.0	6.1	24.4	25.6	
SPIM	3801	38.1	29.0	8.0	77.8	3.5	4.5	156.8
	3802			9.8	58.8	3.8	6.0	
	3803			13.0	47.3	5.5	7.5	
	3804			14.9	38.9	5.8	9.1	
	3805			18.0	33.9	7.6	10.4	
	3806			20.0	29.4	7.9	12.1	
	3807			26.0	23.6	10.8	15.2	
	3808			33.0	18.4	13.5	19.5	
	3809			40.0	14.9	15.8	24.2	
	3810			50.0	11.9	20.2	29.8	
SPIH	3801	38.1	29.0	8.0	77.8	4.6	3.4	264.6
	3802			9.9	58.8	5.4	4.5	
	3803			13.0	47.3	7.4	5.6	
	3804			15.0	38.9	8.2	6.8	
	3805			18.0	33.9	10.2	7.8	
	3806			20.0	29.4	11.0	9.0	
	3807			26.0	23.6	14.8	11.2	
	3808			33.0	18.4	18.6	14.4	
	3809			40.0	14.9	22.2	17.8	
	3810			50.0	11.9	27.8	22.2	


PS 備註

- 荷重(N)=定數(N/mm)×壓縮量(mm)
- 壓縮量=L(自由長 mm)－H(工作高度 mm)
- 1N=0.101972 kgf

 訂貨： - 交期：

SPIM - 2801

RoHS

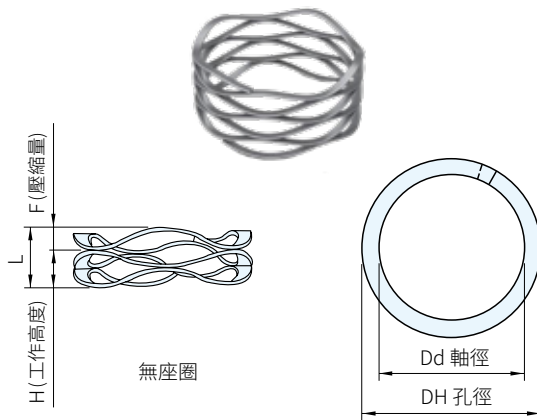

材質
AISI 1070~1090

品號		DH	Dd	L	定數	H	F	荷重
Type	NO	孔徑	軸徑	自由長		工作高度	壓縮量	
Type	NO	mm	mm	mm	N/mm	mm	mm	N
SPIM	4401	44.5	34.0	10.0	46.9	5.3	4.7	220.5
	4402			12.7	35.6	6.5	6.2	
	4403			16.0	28.3	8.2	7.8	
	4404			18.9	23.5	9.5	9.4	
	4405			22.0	21.0	11.5	10.5	
	4406			26.0	17.6	13.5	12.5	
	4407			32.0	14.2	16.5	15.5	
	4408			38.0	11.9	19.5	18.5	
	4409			45.0	10.4	23.7	21.3	
	4410			50.0	8.9	25.3	24.7	
SPIH	4401	44.5	34.0	9.7	121.7	6.4	3.3	401.8
	4402			12.8	89.3	8.3	4.5	
	4403			16.0	73.0	10.5	5.5	
	4404			18.9	60.0	12.2	6.7	
	4405			22.0	53.6	14.5	7.5	
	4406			26.0	45.2	17.1	8.9	
	4407			32.0	36.2	20.9	11.1	
	4408			38.0	30.2	24.7	13.3	
	4409			45.0	26.1	29.6	15.4	
	4410			50.0	23.1	32.6	17.4	
SPIM	5001	50.8	40.6	9.8	38.7	4.1	5.7	220.5
	5002			12.6	29.0	5.0	7.6	
	5003			16.0	23.2	6.5	9.5	
	5004			18.5	19.3	7.1	11.4	
	5005			22.0	16.6	8.7	13.3	
	5006			26.0	14.5	10.8	15.2	
	5007			32.0	11.5	12.9	19.1	
	5008			38.0	9.6	15.1	22.9	
	5009			45.0	8.2	18.2	26.8	
	5010			50.4	7.3	20.0	30.4	
SPIH	5001	50.8	40.6	10.0	89.3	5.5	4.5	401.8
	5002			12.9	65.9	6.8	6.1	
	5003			16.0	53.6	8.5	7.5	
	5004			19.0	43.7	9.8	9.2	
	5005			22.2	38.3	11.7	10.5	
	5006			26.0	33.2	13.9	12.1	
	5007			32.0	26.8	17.0	15.0	
	5008			38.0	21.8	19.6	18.4	
	5009			45.3	19.1	24.3	21.0	
	5010			50.3	16.7	26.3	24.0	

備註

- 荷重(N)=定數(N/mm)×壓縮量(mm)
- 壓縮量=L(自由長 mm)－H(工作高度 mm)
- 1N=0.101972 kgf

訂貨： 品號 - NO 交期： 4 天

SPIM - 4401