


RoHS



Type	材質
WWF	SWP

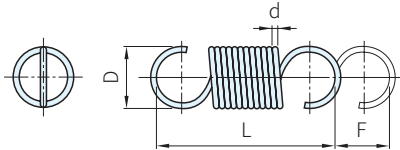

· 中重荷重型

品號	動荷重的情況		初張力 N	定數 N/mm	庫存		
	Type	D-L				線徑 d	最大 拉伸量 Fmax. mm
WWF	3-10	0.45	6.47	1.57	2.2	•	
	15				4.5	1.08	•
	20				6.7	0.74	•
	25				9.1	0.54	•
	30				11.4	0.43	•
WWF	4-15	0.55	8.43	1.86	4.5	•	
	20				7.1	0.93	•
	25				10.0	0.66	•
	30				12.6	0.52	•
	35				15.2	0.43	•
WWF	5-15	0.7	14.71	2.45	18.1	•	
	20				3.9	3.14	•
	25				6.9	1.77	•
	30				9.6	1.28	•
	35				12.5	0.98	•
WWF	6-20	0.9	23.54	5.88	15.6	•	
	25				3.9	4.51	•
	30				6.0	2.94	•
	35				7.8	2.26	•
	40				10.0	1.77	•
WWF	8-25	1.1	31.38	6.86	12.0	•	
	30				3.9	4.51	•
	35				6.0	2.94	•
	40				7.8	2.26	•
	45				10.0	1.77	•
WWF	45	0.9	23.54	5.88	13.8	•	
	50				16.4	1.28	•
	55				18.0	1.08	•
	60				20.0	0.98	•
	60				20.0	0.88	•
WWF	45	1.1	31.38	6.86	15.6	•	
	50				18.5	1.32	•
	55				21.7	1.13	•
	60				23.8	1.03	•
	65				26.3	0.93	•
70	27.8	0.88	•				

品號	動荷重的情況		初張力 N	定數 N/mm	庫存		
	Type	D-L				線徑 d	最大 拉伸量 Fmax. mm
WWF	10-30	1.4	49.03	12.75	6.5	•	
	35				8.7	4.17	•
	40				10.7	3.39	•
	45				12.9	2.81	•
	50				15.2	2.39	•
	55				17.2	2.11	•
	60				19.5	1.86	•
	70				23.1	1.57	•
	80				27.4	1.32	•
	90				32.1	1.13	•
WWF	12-35	1.8	83.36	23.54	46.2	•	
	40				5.0	12.0	•
	45				7.0	8.55	•
	50				9.0	6.65	•
	55				11.0	5.44	•
	60				13.0	4.60	•
	70				14.5	4.13	•
	80				17.8	3.36	•
	90				21.3	2.81	•
	100				24.5	2.44	•
100	27.5	2.18	•				

訂貨： 交期： 天

WWF3-10

PS 備註

· 拉伸彈簧支柱溝槽型TSPO/STSP0，圓孔型WSPO/SWSP0
WIPO/SWIPO詳細規格，請至伍全官網