


RoHS SUS

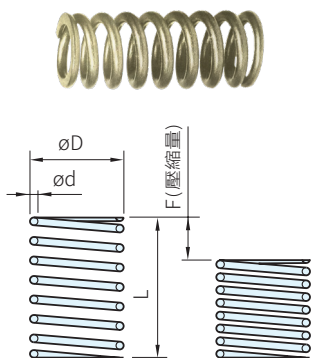

彈簧定數(K)

TYPE	OV	OY	OR	OF	OL	OT	OM	OH	OB
D									
2		0.05	0.2	0.3	0.5				
3	N/mm 0.05	N/mm 0.098	N/mm 0.29	N/mm 0.49	N/mm 0.98	N/mm 1.5	N/mm 2.0	N/mm 2.9	N/mm 4.9
4									
5									
6	N/mm 0.2	N/mm 0.5	N/mm 0.98	N/mm 1.5	N/mm 2.0	N/mm 2.9	N/mm 4.9	N/mm 9.8	
8									
10									
12	N/mm 0.3	N/mm 0.5	N/mm 0.98	N/mm 1.5	N/mm 2.0	N/mm 2.9	N/mm 4.9	N/mm 9.8	
13									
14									
16	N/mm 0.3	N/mm 0.5	N/mm 0.98	N/mm 1.5	N/mm 2.0	N/mm 2.9	N/mm 4.9	N/mm 9.8	
20									

OB : Fmax(容許壓縮量)=L×Fa%

K	D		L	
	≤10	≥12	≤50	≥55
±10%	+0 -0.5	+0 -0.8	±1.5	±2.5

材質	顏色
SUS304	本色

品號	d	密著長	F	荷重	Fa	庫	品號	d	密著長	F	荷重	Fa	庫	品號	d	密著長	F	荷重	Fa	庫
OB	04-05*	0.55	3.3	1.25	6.10	25	OB	10-10	1.3	7.2	2.5	24.50	25	OB	14-15	1.9	10.0	3.75	73.50	25
	10	0.65	7.0	2.5	12.30			15	1.4	10.2	3.75	36.80			20	2.0	13.5	5.0	98.00	
	15	0.70	10.3	3.75	18.40			20	1.5	13.9	5.0	49.00			25	2.1	16.3	6.25	122.50	
	20	0.75	14.4	5.0	24.50			25	1.5	16.1	6.25	61.30			30	2.3	21.3	7.5	147.00	
	25	0.80	19.4	5.0	24.50			30	1.6	20.4	7.5	73.50			35	2.3	24.7	8.75	171.50	
	30	0.80	19.4	6.0	29.40			40	1.6	22.8	8.75	85.80			40	2.4	28.2	10.0	196.00	
OB	05-05	0.6	2.9	1.25	6.10	25	OB	40	1.7	27.2	10.0	98.00	20	OB	45	2.4	27.6	11.25	220.50	20
	10	0.75	6.9	2.5	12.30			45	1.7	30.6	11.25	110.30			50	2.5	36.25	12.5	245.00	
	15	0.8	9.8	3.75	18.40			50	1.8	36.5	12.5	122.50			60	2.6	43.6	15.0	294.00	
	20	0.85	13.4	5.0	24.50			60	1.8	41.4	15.0	147.00			70	2.6	42.9	14.0	274.40	
	25	0.9	17.8	6.25	30.60			70	1.9	50.8	17.5	171.50			80	2.7	61.4	16.0	313.60	
	30	0.9	21.8	7.5	36.80			OB	12-15	1.5	9.4	3.75			36.80	25	OB	16-15	2.0	
35	0.9	18.0	7.0	34.30	20	1.6	12.4		5.0	49.00	20	2.1	12.1	5.0	98.00					
40	1.0	31.5	8.0	39.20	25	1.7	16.2		6.25	61.30	25	2.3	17.3	6.25	122.50					
45	1.0	31.5	9.0	44.10	30	1.8	20.3		7.5	73.50	30	2.4	21.0	7.5	147.00					
50	1.1	17.9	6.25	61.30	35	1.9	25.2		8.75	85.80	35	2.5	24.4	8.75	171.50					
60	1.2	23.1	6.0	58.80	40	1.9	28.0		10.0	98.00	40	2.6	28.0	10.0	196.00					
OB	06-05	0.8	3.6	1.25	12.30	25	OB	45	2.0	32.5	11.25	110.30	20	OB	45	2.7	31.7	11.25	220.50	20
	10	0.9	6.8	2.5	24.50			50	2.0	35.5	12.5	122.50			50	2.7	35.8	12.5	245.00	
	15	1.0	10.5	3.75	36.80			60	2.1	43.6	15.0	147.00			60	2.9	43.5	15.0	294.00	
	20	1.1	14.6	5.0	49.00			70	2.1	48.8	17.5	171.50			70	2.9	49.4	17.5	343.00	
	25	1.1	17.9	6.25	61.30			80	2.2	58.5	20.0	196.00			80	3.0	59.3	16.0	313.60	
	30	1.2	23.1	6.0	58.80			OB	13-15	1.8	9.5	3.75			73.50	25	OB	20-25	2.9	
35	1.2	27.3	7.0	68.60	20	1.9	12.9		5.0	98.00	30	3.0	20.3	7.5	221.00					
40	1.2	31.2	8.0	78.40	25	2.0	17.0		6.25	122.50	35	3.0	22.7	8.75	257.00					
45	1.3	34.8	9.0	88.20	30	2.1	20.5		7.5	147.00	40	3.2	27.2	10.0	294.00					
50	1.3	38.4	10.0	98.00	35	2.2	24.8		8.75	171.50	45	3.2	29.6	9.0	265.00					
60	1.3	44.2	9.0	88.20	40	2.3	28.2		10.0	196.00	50	3.4	38.3	10.0	294.00					
OB	08-10	1.1	6.9	2.5	24.50	20	OB	45	2.3	32.2	11.25	220.50	20	OB	60	3.5	44.6	12.0	353.00	
	15	1.2	9.9	3.75	36.80			50	2.4	36.0	12.5	245.00			20					
	20	1.3	14.0	5.0	49.00			60	2.5	44.4	12.0	235.20								
	25	1.3	14.5	6.25	61.30			70	2.6	54.0	14.0	274.40								
	30	1.4	21.4	7.5	73.50			80	2.6	53.3	16.0	313.60								
	35	1.4	22.0	8.75	85.80			OB	08-10	1.1	6.9	2.5				24.50	25	OB	10-10	1.3
40	1.5	28.9	10.0	98.00	15	1.2	9.9		3.75	36.80	15	1.4	10.5	3.75		36.80				
45	1.5	32.6	11.25	110.30	20	1.3	14.0		5.0	49.00	20	1.5	16.1	6.25	61.30					
50	1.6	38.4	10.0	98.00	25	1.4	19.4		5.0	24.50	25	1.7	25.2	8.75	85.80					
60	1.6	38.4	12.0	117.60	30	1.5	21.8		6.25	30.60	30	1.9	27.2	10.0	98.00					

訂貨：  交期：  天

OB04-05

PS. 備註

- 荷重(N)=定數(N/mm)×壓縮量(mm)
- 密著長是參考值，製作時會有少許差異
- \*記號兩端皆不研磨
- 耐熱溫度80°C
- 1N=0.101972 kgf
- 非標準規格彈簧訂購請參考本單元底頁