



固定蓋板		彈簧	滾針	
材質	記號	材質	材質	硬度
碳素鋼	FS：長固定蓋板 FSS：短固定蓋板	SWP-B	特殊鋼	HRC60~63


長固定蓋板

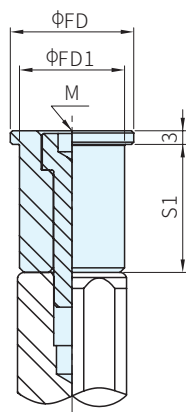


短固定蓋板

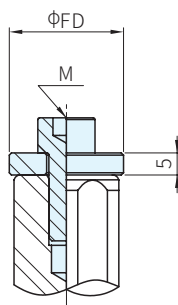

彈簧



滾針套



ZGS

## 選配件

品號		固定蓋板				彈簧		配合導柱品號		
長固定蓋板	短固定蓋板	FD	FD1	S1	M	品號	RL			
GNZC6-FS	GNZC6-FSS	-	-	-	-	ZGS	-	-	GNZC6	
GNZC9-FS	GNZC9-FSS	-	-	-	-		9	30~50	5mm 指定	GNZC9
GNZC12-FS	GNZC12-FSS	-	-	-	-		12	30~100		GNZC12
GNZC16-FS	GNZC16-FSS	17.5	14.4	14	6		16	30~100		GNZC16
GNZC20-FS	GNZC20-FSS	21.0	18.0	23	8		20	40~100		GNZC20
GNZC25-FS	GNZC25-FSS	26.0	23.0	28	8		25	55~125		GNZC25
GNZC28-FS	GNZC28-FSS	30.0	25.5	30	8		28	55~145		GNZC28
GNZC30-FS	GNZC30-FSS	32.0	27.5	31	10		30	50~160	GNZC30	
GNZC35-FS	GNZC35-FSS	37.0	32.5	34	10		35	65~175	GNZC35	
GNZC40-FS	GNZC40-FSS	43.0	38.0	36	12		40	70~170	10mm 指定	GNZC40
GNZC50-FS	GNZC50-FSS	52.5	47.5	38	12		50	90~200		GNZC50
GNZC60-FS	GNZC60-FSS	64.5	57.5	54	14		60	100~220		GNZC60
GNZC80-FS	GNZC80-FSS	86.0	79.0	62	16		80	100~220		GNZC80

## 【Ps】備註

- 本產品精密度高,使用時必須整組購買
- 本產品滾針導件的標準預壓量是2~6μm
- 有效行程：滾針保持器無法從導套飛出去的可能使用範圍
- 不銹鋼材質歡迎洽詢

訂貨：品號 - RL 交期：請洽詢

ZGS16 - 50