

xiros® 徑向深溝滾珠軸承 | 產品範圍

由xirodur A500製成的內外環 - 化學和溫度穩定性高達+ 150° C

PA 保持器,
不銹鋼滾珠PEEK 保持器,
不銹鋼滾珠PEEK 保持器,
玻璃滾珠PEEK 保持器,
PAI 滾珠


技術參數

尺寸	徑向負載能力				最大速度 [rpm]	重量			
	靜態	動態	靜態	動態		PA/ 不銹鋼	PEEK/ 不銹鋼	PEEK/ 玻璃	PEEK/ PAI
	[N]	[N]	PEEK/PAI [N]			[g]	[g]	[g]	[g]
623	27	30	-	-	5000	.4	.4	.3	-
624	30	40	-	-	4500	1.9	1.0	.9	-
625	36	43	-	-	3700	-	-	-	-
635	48	52	-	-	3400	-	-	-	-
626	54	60	15	20	3400	2.3	2.3	1.6	1.4
636	72	76	-	-	2450	-	-	-	-
627	72	74	-	-	2600	-	-	-	-
688	36	38	-	-	3150	-	-	-	-
608	72	78	18	25	2700	3.7	3.7	2.4	2.2
628	98	104	-	-	2500	-	-	-	-
638	102	108	-	-	2300	-	-	-	-
629	102	112	-	-	2350	-	-	-	-
6800	42	46	-	-	2300	-	-	-	-
6000	102	107	25	34	2100	6.0	6.0	3.8	3.4
6200	126	132	-	-	2100	-	-	-	-
6801	54	57	-	-	2150	-	-	-	-
6001	105	124	-	-	2040	-	-	-	-
6201	132	141	-	-	1820	-	-	-	-
6802	72	76	-	-	1920	-	-	-	-
6002	132	145	32	41	1900	9.1	9.1	5.2	5.6
6202	135	146	-	-	1600	-	-	-	-
6803	84	84	-	-	1760	-	-	-	-
6003	138	152	-	-	1790	-	-	-	-
6203	228	232	-	-	1450	-	-	-	-



訂購範例：

BB-623-A500-10-ES = 徑向深溝滾珠軸承 xirodur A500, PA 保持器 及 不銹鋼滾珠

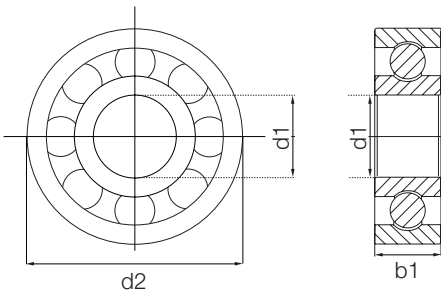

產品型號

類型 材質

BB-623-A500-10-ES

滾珠軸承
尺寸根據 DIN 625-1標準
內外環的材料
保持器材質
滾珠材質

- 選項
 保持器材質
 10 = PA
 70: PEEK
 滾珠材質
 ES: = 不鏽鋼
 GL: = 玻璃珠
 PAI: 聚酰胺 - 酰亞胺

尺寸 [mm]

內徑 Ø	外徑 Ø	寬度	保持器/滾珠 材質組合				零件號
			PA/ES	PEEK/ES	PEEK/GL	PEEK/PAI	
d1	d2	b1					
3	10	4	●	●	●	-	BB-623-A500-□-□
4	13	5	●	●	●	-	BB-624-A500-□-□
5	16	5	●	●	●	-	BB-625-A500-□-□
5	19	6	●	●	●	-	BB-635-A500-□-□
6	19	6	●	●	●	●	BB-626-A500-□-□
6	22	7	●	●	●	-	BB-636-A500-□-□
7	22	7	●	●	●	-	BB-627-A500-□-□
8	16	5	●	●	●	-	BB-688-A500-□-□
8	22	7	●	●	●	●	BB-608-A500-□-□
8	24	8	●	●	●	-	BB-628-A500-□-□
8	28	9	●	●	●	-	BB-638-A500-□-□
9	26	8	●	●	●	-	BB-629-A500-□-□
10	19	5	●	●	●	-	BB-6800-A500-□-□
10	26	8	●	●	●	●	BB-6000-A500-□-□
10	30	9	●	●	●	-	BB-6200-A500-□-□
12	21	5	●	●	●	-	BB-6801-A500-□-□
12	28	8	●	●	●	●	BB-6001-A500-□-□
12	32	10	●	●	●	-	BB-6201-A500-□-□
15	24	5	●	●	●	-	BB-6802-A500-□-□
15	32	9	●	●	●	●	BB-6002-A500-□-□
15	35	11	●	●	●	-	BB-6202-A500-□-□
17	26	5	●	●	●	-	BB-6803-A500-□-□
17	35	10	●	●	●	●	BB-6003-A500-□-□
17	40	12	●	●	●	-	BB-6203-A500-□-□



現貨供應
請洽易格斯

xiros® 徑向深溝滾珠軸承 | 產品範圍

由xirodur A500製成的內外環 - 化學和溫度穩定性高達+ 150° C

技術參數

尺寸	徑向負載能力				最大速度	重量			
	靜態	動態	靜態	動態		PA/ 不鏽鋼	PEEK/ 不鏽鋼	PEEK/ 玻璃	PEEK/ PAI
	[N]	[N]	PEEK/PAI [N]			[g]	[g]	[g]	[g]
6804	90	93	-	-	1560	-	-	-	-
6004	234	250	62	88	1700	19.7	19.7	13.2	11.7
6204	234	238	-	-	1270	-	-	-	-
6805	132	135	-	-	980	-	-	-	-
6005	405	420	-	-	1500	-	-	-	-
6205	348	356	-	-	1100	-	-	-	-



訂購範例：

BB-623-A500-10-ES = 徑向深溝滾珠軸承，內外環材料 xirodur A500, PA 保持器 及 不銹鋼滾珠軸承

尺寸 [mm]

內徑 Ø	外徑 Ø	寬度	保持器/滾珠 材質組合				零件號
			PA/ES	PEEK/ES	PEEK/GL	PEEK/PAI	
d1	d2	b1					
20	32	7	●	●	●	-	BB-6804-A500- <input type="text"/> - <input type="text"/>
20	42	12	●	●	●	●	BB-6004-A500- <input type="text"/> - <input type="text"/>
20	47	14	●	●	●	-	BB-6204-A500- <input type="text"/> - <input type="text"/>
25	37	7	●	●	●	-	BB-6805-A500- <input type="text"/> - <input type="text"/>
25	47	12	●	●	●	●	BB-6005-A500- <input type="text"/> - <input type="text"/>
25	52	15	●	●	●	-	BB-6205-A500- <input type="text"/> - <input type="text"/>



現貨供應
請洽易格斯