




材質
PE
(UHMWPE)

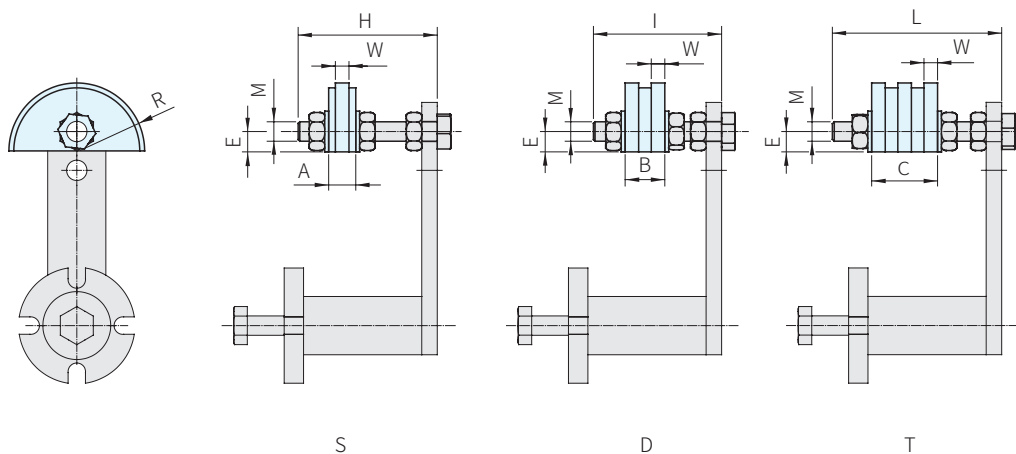

品號			鏈條		節距	NO.	A	B	C	E	H	I	L	M	R	W
Type	MODEL		節距	NO.												
	S	D	T													
TC-VR10-0	RE011110	RE011150	-	8mm	-	10	10	12	-	10	45	45	-	M8	35	2.5
TC-VR10-1	RE011111	RE011152	-	3/8"×7/32"	-	10	10	18	-		45	45	-	M8		5
TC-VR20-1	-	-	RE011191	3/8"×7/32"	40	20	-	-	25	10	-	-	45	M10	35	7
TC-VR20-2	RE011113	RE011155	-	1/2"×5/16"	40	20	-	-	-		55	55	-	M10		7
TC-VR30-2	RE011114	RE011156	RE011194	1/2"×5/16"	40	30	14	20.5	-	12	55	60	70	M12	45	9
TC-VR30-3	RE011117	RE011160	-	5/8"×3/8"	50	30	16.5	25	-		70	70	-	M12		9
TC-VR40-3	-	-	RE011199	5/8"×3/8"	50	40	-	-	42	12	-	-	100	M10	45	11
TC-VR30-4	RE011120	RE011163	-	3/4"×7/16"	60	30	17.5	30	-		60	70	-	M10		11
TC-VR40-4	RE011121	RE011164	RE011202	3/4"×7/16"	60	40	18	30	49	20	80	80	100	M12	55	16
TC-VR40-5	RE011124	RE011167	RE011205	1"×17.02mm	-	40	18	47	79.5		80	90	100	M12		16
TC-VR50-5	-	RE011168	RE011206	1"×17.02mm	-	50	-	47	79.5	20	-	100	120	M20	55	18
TC-VR50-6	RE011128	RE011172	RE011210	1"1/4×3/4"	100	50	20	54	91		100	120	130	M20		18
TC-VR50-7	RE011134	RE011176	RE011214	1"1/2×1"	120	50	24	72	120	100	120	130	M20	55	24	

PS. 備註

- 工作速度 ≤ 20M/分
- 滑塊工作溫度 ≤ 70°C
- TC-VR適用於小軸距或者靠近鏈輪位置安裝

訂貨： - 交期： 天 S
 天 D·T
 TC-VR10-0 - S

Wa. 注意

- 和TC-RE、TC-REP、TC-FE、TC-FEP、TC-BE、TC-BEP、TC-ME、TC-MEP、TC-ABN……組立使用