




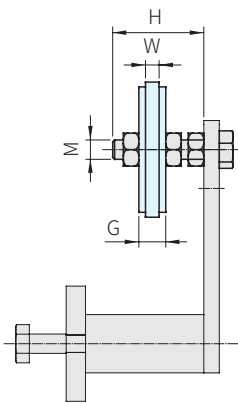

材質
PE UHMWPE

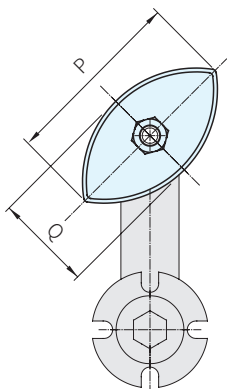

S

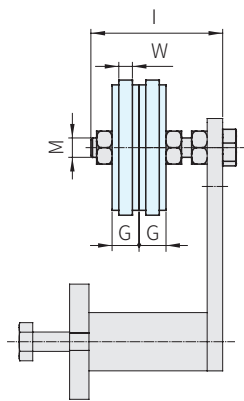

D

品號		鏈條		NO.	G	H	I	M	P	Q	W	質量 (kg)		庫存	
Type	MODEL		節距									S	D		
	S	D													
TC-OVR10-1	RE011030	RE011040	3/8"×7/32"	—	10	10.2	45	45	M8	75	40	5	0.09	0.10	·
TC-OVR20-2	RE011032	RE011042	1/2"×5/16"	40	20	13.9	55	55	M10	96	50	7	0.10	0.11	·
TC-OVR30-2	RE011032	RE011044	1/2"×5/16"		30	13.9	55	60	M10	96	50	7	0.11	0.12	·
TC-OVR30-3	RE011034	RE011046	5/8"×3/8"	50	30	16.6	55	70	M12	126	65	9	0.12	0.14	·
TC-OVR30-4	RE011036	RE011048	3/4"×7/16"	60	30	19.5	60	70	M10	148	74	11	0.13	0.15	·
TC-OVR40-4	RE011038	RE011050	3/4"×7/16"		40	19.5	80	80	M12	148	74	11	0.20	0.22	·

PS. 備註

- 工作速度 ≤ 20M/分
- 滑塊工作溫度 ≤ 70°C
- TC-OVR特殊橢圓形適合雙邊使用

訂貨： - 交期： 天

TC-OVR10-1 - S

Wa. 注意

- 和TC-RE、TC-REP、TC-FE、TC-FEP、TC-BE、TC-BEP、TC-ME、TC-MEP、TC-ABN……組立使用