


02439

訂購

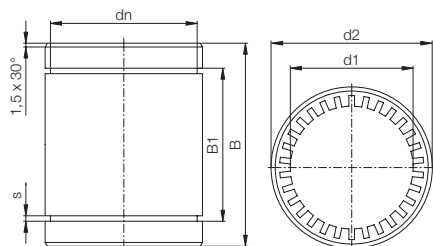

類型

尺寸

R J 4 J P-01-10

| | | | | | |
|-----|------------|------|-----|-----|----|
| 封閉式 | igidur® J4 | 日本規格 | 精密性 | 標準型 | d1 |
|-----|------------|------|-----|-----|----|

- 替代日本規格的滾珠軸承
- 快速裝配
- 由卡簧固定



⁷⁸⁾ 根據 igus® 測試方法 ▶ 頁碼 1038

⁸²⁾ 設計品標準 ▶ 頁碼 980

請注意: 安裝說明 ▶ 頁碼 981

材質表 ▶ 頁碼 1494



最低溫度 -20 ° C

耐高溫達 +60 ° C

尺寸 [mm]

| d1 | d2 | B | B1 | s | dn | 產品型號 |
|----|----|----|------|------|------|-------------|
| 8 | 15 | 24 | 17.5 | 1.1 | 14.3 | RJ4JP-01-08 |
| 10 | 19 | 29 | 22.0 | 1.3 | 18.0 | RJ4JP-01-10 |
| 12 | 21 | 30 | 23.0 | 1.3 | 20.0 | RJ4JP-01-12 |
| 16 | 28 | 37 | 26.5 | 1.6 | 26.6 | RJ4JP-01-16 |
| 20 | 32 | 42 | 30.5 | 1.6 | 30.3 | RJ4JP-01-20 |
| 25 | 40 | 59 | 41.1 | 1.85 | 37.5 | RJ4JP-01-25 |
| 30 | 47 | 64 | 44.6 | 1.85 | 42.5 | RJ4JP-01-30 |

技術數據

| 產品型號 | d1-公差 ⁷⁸⁾ [mm] | F 最大值 動態 ⁸²⁾ p = 5 MPa [N] | | F 最大值 靜態 ⁸²⁾ p = 35 MPa [N] | | 重量 [g] |
|-------------|------------------------------|---|--------|--|--|-----------|
| | | +0.000 | +0.040 | | | |
| RJ4JP-01-08 | +0.000 +0.040 | 200 | 800 | 2 | | |
| RJ4JP-01-10 | +0.000 +0.040 | 300 | 1,200 | 6 | | |
| RJ4JP-01-12 | +0.000 +0.040 | 400 | 1,600 | 8 | | |
| RJ4JP-01-16 | +0.000 +0.040 | 700 | 2,800 | 16 | | |
| RJ4JP-01-20 | +0.000 +0.040 | 1,000 | 4,000 | 23 | | |
| RJ4JP-01-25 | +0.000 +0.050 | 1,550 | 6,500 | 47 | | |
| RJ4JP-01-30 | +0.000 +0.050 | 2,200 | 8,500 | 72 | | |