



02439 訂購

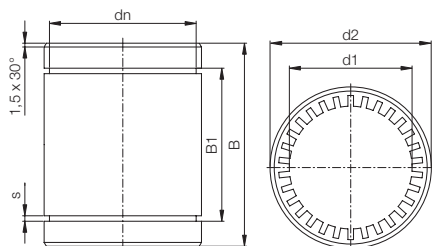

類型 尺寸

R J M-01-10



- 壓配安裝
- 由卡簧固定

最低溫度 -20 ° C
耐高溫達 +60 ° C

78) 根據 igus® 測試方法 ▶ 頁碼 1038

82) 設計品標準 ▶ 頁碼 980

83) 透過室溫下的應用: 壓配減少
及溫度減少

隨著時間

請注意: 安裝說明 ▶ 頁碼 981

英制尺寸

▶ 頁碼 1457

尺寸 [mm]

d1	d2	B	B1	s	dn	產品型號
8	16	25	16.2	1.10	15.2	RJM-01-08
10	19	29	21.6	1.30	17.5	RJM-01-10
12	22	32	22.6	1.30	20.5	RJM-01-12
16	26	36	24.6	1.30	24.2	RJM-01-16
20	32	45	31.2	1.60	29.6	RJM-01-20
25	40	58	43.7	1.85	36.5	RJM-01-25
30	47	68	51.7	1.85	43.5	RJM-01-30
40	62	80	60.3	2.15	57.8	RJM-01-40

技術數據

產品型號	d1-公差 ⁷⁸⁾	F 最大值 動態 ⁸²⁾	F 最大值 靜態 ⁸²⁾	重量	壓力 ⁸³⁾
	[mm]	p = 2.5 MPa [N]	p = 17.5 MPa [N]		
RJM-01-08	+0.025 +0.061	250	1,750	4	400
RJM-01-10	+0.032 +0.075	363	2,538	7	700
RJM-01-12	+0.032 +0.075	480	3,360	9	1,300
RJM-01-16	+0.032 +0.075	720	5,040	13	1,100
RJM-01-20	+0.040 +0.092	1,125	7,875	24	1,500
RJM-01-25	+0.040 +0.092	1,813	12,688	47	3,500
RJM-01-30	+0.040 +0.092	2,550	17,850	72	4,500
RJM-01-40	+0.050 +0.112	4,000	28,000	127	4,200

可配合:



RQA-04



RTA-04



RGA-04



RGAS-04