


drylin® R 工程塑膠軸承 | 產品範圍

標準型號, 精密型, 由iglidur® J材料製成(通用型)

02439


產品代碼

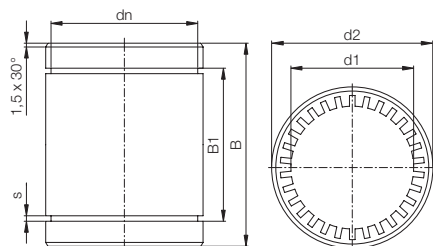

類型

尺寸

R J M P-01-10



- 透過較小壓力安裝方便
- 軸承間隙減小
- 由卡簧固定



78) 根據 igus® 測試方法 ▶ 頁碼 1038

82) 設計品標準 ▶ 頁碼 980

請注意: 安裝說明 ▶ 頁碼 981



最低溫度 -20 ° C

耐高溫達 +60 ° C



英制尺寸

▶ 頁碼 1457

尺寸 [mm]

d1	d2	B	B1	s	dn	產品型號
6	12	19	13.5	1.10	11.5	RJMP-01-06
8	16	25	16.2	1.10	15.2	RJMP-01-08
10	19	29	21.6	1.30	17.5	RJMP-01-10
12	22	32	22.6	1.30	20.5	RJMP-01-12
16	26	36	24.6	1.30	24.2	RJMP-01-16
20	32	45	31.2	1.60	29.6	RJMP-01-20
25	40	58	43.7	1.85	36.5	RJMP-01-25
30	47	68	51.7	1.85	43.5	RJMP-01-30

技術數據

產品型號	d1-公差 ⁷⁸⁾		F 最大值 動態 ⁸²⁾		F 最大值 靜態 ⁸²⁾		重量
	[mm]		p = 2.5 MPa		p = 17.5 MPa		
			[N]	[N]	[N]	[N]	[g]
RJMP-01-06	+0.000	+0.030	200	1,400	2		
RJMP-01-08	+0.000	+0.040	250	1,750	4		
RJMP-01-10	+0.000	+0.040	363	2,538	7		
RJMP-01-12	+0.000	+0.040	480	3,360	9		
RJMP-01-16	+0.000	+0.040	720	5,040	13		
RJMP-01-20	+0.000	+0.040	1,125	7,875	24		
RJMP-01-25	+0.000	+0.050	1,813	12,688	47		
RJMP-01-30	+0.000	+0.050	2,550	17,850	72		

可配合:



RQA-04



RTA-04



RGA-04



RGAS-04