


## drylin® R 工程塑膠軸承 | 產品範圍

低成本直線滑動軸承由 iglidur® J260 製成

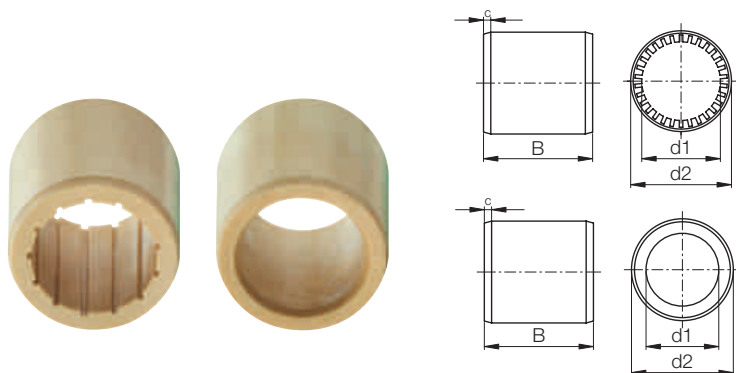

02439 訂購

類型

尺寸

R J260 U M-02-12



● 2種選擇: RJ260M (平滑設計) 和RJ260UM (溝槽結構)



78) 根據 igus® 測試方法 ▶ 頁碼 1038

82) 設計品標準 ▶ 頁碼 980

請注意: 安裝說明 ▶ 頁碼 981



最低溫度 -20 ° C

耐高溫達 +60 ° C

尺寸 [mm]

d1	d2	B	C	產品型號
12	19	28	1.5x15°	RJ260UM-02-12
16	24	30	1.5x15°	RJ260UM-02-16
20	28	30	2.0x15°	RJ260UM-02-20
25	35	40	2.0x15°	RJ260UM-02-25

技術數據

產品型號	d1-公差 <sup>78)</sup> [mm]	F 最大值 動態 <sup>82)</sup> p = 2.5 MPa [N]	F 最大值 靜態 <sup>82)</sup> p = 17.5 MPa [N]	重量 [g]
		RJ260UM-02-12	+0.035 +0.080	
RJ260UM-02-16	+0.035 +0.080	600	4,200	9.7
RJ260UM-02-20	+0.040 +0.095	750	5,250	11.7
RJ260UM-02-25	+0.040 +0.095	1,250	8,750	22.8