


高荷重脚轮

GF series

kg 650~1,300kg

RoHS

-10~90°C

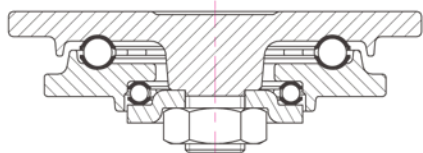

产品说明: 锻造脚轮座, 使用强化热处理的双重钢珠槽旋转结构, 坚固的焊接支架, 钢制踏板刹车系统, 螺栓式轮轴紧固构造
表面处理: 镀锌

* 4轮允许承载 = 单轮运行承载 × 3

| 万向型 | 固定型 | 万向刹车型 | 固定刹车型 | 轮子种类 |  mm |  mm |  Kg |  mm |  mm |  mm |  mm |  mm |
|------------|------------|------------|------------|------|---|---|---|---|--|---|---|---|
| GF-100-ASF | GF-100-ARF | GF-100-BSF | GF-100-BRF | MUD | 100 | 67 | 650 | 145 | 37 | 159x114 | 134x86 126x62 | 13 |
| GF-125-ASF | GF-125-ARF | GF-125-BSF | GF-125-BRF | | 125 | 64 | 750 | 167 | 44 | | | |
| GF-150-ASF | GF-150-ARF | GF-150-BSF | GF-150-BRF | | 150 | 64 | 800 | 190 | 52 | | | |
| GF-200-ASF | GF-200-ARF | GF-200-BSF | GF-200-BRF | | 200 | 64 | 850 | 257 | 57 | | | |
| GF-250-ASF | GF-250-ARF | GF-250-BSF | GF-250-BRF | | 250 | 64 | 1,200 | 300 | 61 | | | |
| GF-100-ASF | GF-100-ARF | GF-100-BSF | GF-100-BRF | MCD | 100 | 67 | 800 | 145 | 37 | 159x114 | 134x86 126x62 | 13 |
| GF-125-ASF | GF-125-ARF | GF-125-BSF | GF-125-BRF | | 125 | 64 | 900 | 167 | 44 | | | |
| GF-150-ASF | GF-150-ARF | GF-150-BSF | GF-150-BRF | | 150 | 64 | 1,000 | 190 | 52 | | | |
| GF-200-ASF | GF-200-ARF | GF-200-BSF | GF-200-BRF | | 200 | 64 | 1,100 | 257 | 57 | | | |
| GF-250-ASF | GF-250-ARF | GF-250-BSF | GF-250-BRF | | 250 | 64 | 1,300 | 300 | 61 | | | |

选项

| |  |  |  | | | |
|------|---|---|---|--|--|--|
| 产品编号 | MUD | MCD | -FRN | | | |
| 产品特征 | 浇注型聚氨酯(A95) | MC尼龙(D80) | 刹车方向 | | | |
| 适用型号 | 100 ~ 250 | 100 ~ 250 | 150 ~ 250 | | | |