



高荷重脚轮

GXT series

kg 500~2,700kg **RoHS** **°C** -10~90°C

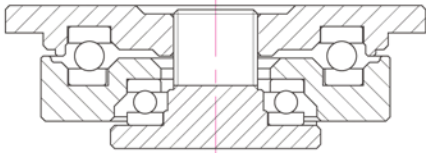

GXT(80~100)

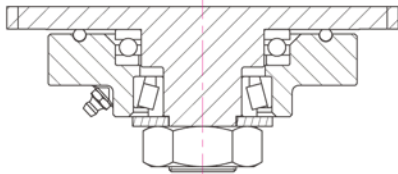

GXT(125~250)

产品说明: 锻造脚轮座, 使用2列推力球轴承优化旋高荷重转性的结构(125~250系列: 推力球轴承+圆锥滚子轴承), 坚固的焊接支架, 手动刹车系统, 使用特殊形态的轮轴强化旋转性
表面处理: 粉末喷涂, 镀锌

* 4轮允许承载 = 单轮运行承载 × 3

万向型	固定型	万向刹车型	轮子种类	 mm	 mm	 Kg	 mm	 mm	 mm	 mm	 mm
GXT-80-ASF	GXT-80-ARF	GXT-80-BSF	HUD	80	48	500	120	40	100x85	80x60	9
GXT-100-ASF	GXT-100-ARF	GXT-100-BSF		100	48	600	140	40			
GXT-125-ASF	GXT-125-ARF	GXT-125-BSF		125	70	1,100	170	77.5			
GXT-150-ASF	GXT-150-ARF	GXT-150-BSF		150	68	1,500	224	48	175x140	148x111 132x99	14
GXT-200-ASF	GXT-200-ARF	GXT-200-BSF		200	68	2,000	275	60			
GXT-250-ASF	GXT-250-ARF	GXT-250-BSF		250	64	2,300	310	75			
GXT-80-ASF	GXT-80-ARF	GXT-80-BSF	MCD	80	48	800	120	40	100x85	80x60	9
GXT-100-ASF	GXT-100-ARF	GXT-100-BSF		100	48	900	140	40			
GXT-125-ASF	GXT-125-ARF	GXT-125-BSF		125	70	1,500	170	77.5			
GXT-150-ASF	GXT-150-ARF	GXT-150-BSF		150	70	2,200	200	80	175x140	148x111 132x99	14
GXT-200-ASF	GXT-200-ARF	GXT-200-BSF		200	70	2,500	260	75			
GXT-250-ASF	GXT-250-ARF	GXT-250-BSF		250	70	2,700	310	75			
GXT-100-ASF	GXT-100-ARF	GXT-100-BSF	NYD	100	48	900	140	40	100x85	80x60	9

选项

						
产品编号	HUD	HUD	MCD	NYD		
产品特征	浇注型聚氨酯(D70)	浇注型聚氨酯(A95)	MC尼龙(D80)	尼龙66(D70)		
适用型号	80 ~ 100	125 ~ 250	80 ~ 250	100		