


## 减震脚轮

# GDS series

 90~350kg
  RoHS
  -10~90°C

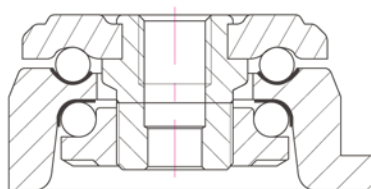

产品说明: 冲压脚轮座(130~200系列: 锻造), 使用强化热处理的双重钢珠槽旋转结构, 象牙白铝制壳体, 使用特殊橡胶的微小冲击吸收功能(A65, A75 可选), 柔和制动的踏板式刹车系统, 采用特殊形状的轮轴强化柔和旋转性

表面处理: 粉末喷涂, 镀锌

\* 4轮允许承载 = 单轮运行承载 × 3

万向型	固定型	万向 刹车型	固定 刹车型	轮子 种类	减震							
						mm	mm	Kg	mm	mm	mm	mm
GDS-75-ASS	GDS-75-ARS	-	-	LUD	65° / 75°	75	30	90	130-15	35~39	M12x1.75P	18
GDS-100-ASS	GDS-100-ARS	GDS-100-BSS	GDS-100-BRS			100	30	100	160-20	45~53		
GDS-125-ASS	GDS-125-ARS	GDS-125-BSS	GDS-125-BRS			125	30	100	187-20	45~54		
GDS-130-ASS	GDS-130-ARS	GDS-130-BSS	GDS-130-BRS	HUD		130	40	350	200-30	36~50	M16x2.0P	24
GDS-150-ASS	GDS-150-ARS	GDS-150-BSS	GDS-150-BRS			150	40	350	230-30	36~50		
GDS-200-ASS	GDS-200-ARS	GDS-200-BSS	GDS-200-BRS			200	40	350	270-35	55~76		

### 选项

						
产品编号	LUD	HUD	-FBL	-WEU		
产品特征	浇注型聚氨酯(A90)	浇注型聚氨酯(A95)	黑色壳体	防静电轮(黑色)		
适用型号	75 ~ 125	130 ~ 200	75 ~ 200	75 ~ 200		