

RoHS









QVA



QVAH



QVAB



品號	管徑 D	A	B	C1	C2	E	F	G	J	L	有效斷面積 mm ²	開關旋鈕	質量 (g)
QVA4-4	4	13	36.4	10.6	11.5	18.8	18.8	11.5	-	20.9	9.6	單邊	10
QVA6-6	6		37.1	11.6	11.8	19.2							15
QVA8-8	8	18	46.8	16.7	16.7	22.7	26.5	17	36	27.7	19.6	雙邊	25
QVA10-10	10		50.9	18.7	18.7	29.2	30	24					34
QVA12-12	12		61.5	21.2	19.8	31.6	30	24		36	55		


品號	管徑 D	牙徑 M	A	B	C1	C2	E	F	G	J	K	L	對邊 H1	對邊 H2	有效斷面積 mm ²	開關旋鈕	質量 (g)
QVAH4-4	4	M12×1	13	51.1	10.6	11.2	18.8	18.8	11.5	-	13.6	20.9	14	14	9.6	單邊	35
QVAH6-6	6			51.8	11.6	11.6	19.2				13.9		14	14			47
QVAH8-8	8	M16×1	18	67.7	16.6	18.6	22.7	26.5	17	36	20.2	27.7	19	19	19.6	雙邊	60
QVAH10-10	10	M20×1		80.8	18.7	20.9	22.8	30	24		21.0		34	24			24
QVAH12-12	12	M22×1		84.4	19.2	23.7	31.6	30	24		22.2	36	24	24	50.2		110

品號	管徑 D	牙徑 M	A	B	C	E	F	G	J	K	L	對邊 H	有效斷面積 mm ²	開關旋鈕	質量 (g)
QVAB4-M5	4	M5	13	42.4	10.6	18.8	18.8	11.5	-	4.1	20.9	12	9.6	單邊	12
QVAB4-01		PT 1/8"		44.9											6
QVAB6-M5	6	M5	18	42.8	11.6	19.2	26.5	17	36	4.1	27.7	19	19.6	雙邊	18
QVAB6-01		PT 1/8"		45.3											6
QVAB8-01	8	PT 1/4"	18	55	16.6	22.7	26.5	17	36	6	27.7	19	19.6	雙邊	42
QVAB8-02				PT 3/8"											58
QVAB8-03				PT 1/2"							69.6	11	50		
QVAB10-02	10	PT 1/4"	18	69.6	18.7	22.8	30	24	36	9	34	24	50.2	雙邊	91
QVAB10-03		PT 3/8"													99
QVAB10-04	PT 1/2"	71.6	11	99											
QVAB12-02	12	PT 1/4"	18	71.6	19.2	31.6	30	24	36	9	34	24	50.2	雙邊	90
QVAB12-03		PT 3/8"													95
QVAB12-04	PT 1/2"	73.6	11	100											

訂貨： 交期：
 QVA4-4

Te. 技術資料

· 內部結構圖

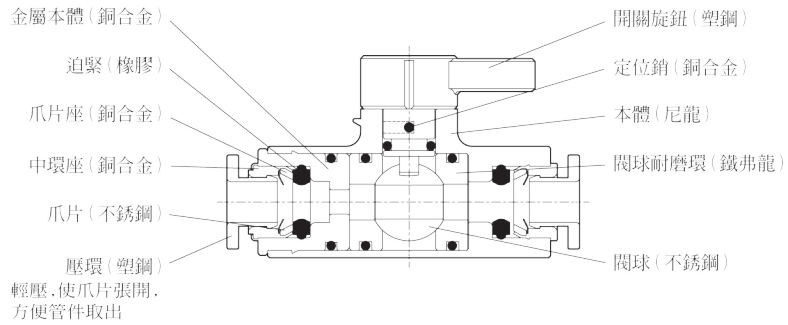

· 規格表

項目		管徑	φ 4, φ 6, φ 8, φ 10, φ 12
		使用流體	
設定壓力範圍	Kgf/cm ² (Kpa)		0 ~ 9 (0 ~ 900)
保證耐壓力	Kgf/cm ² (kpa)		10 (1000)
保證真空壓力			-100 kPa (10 Torr)
使用溫度範圍	°C		5 ~ 60
材質	主體		黃銅 (鍍銀)
	塑膠		NYLON, PBT, PP
連接口徑	Rc(PT)		M5×0.8p, 1/8", 1/4", 3/8"
牙部塗料			附塗膠