

**MATERIAL**

Polyamide-based (PA) technopolymer, black colour RAL 9005, matte finish.

**ELASTIC FORK**

Acetal-based technopolymer (POM), black colour.

**PACKING RINGS**

Two NBR synthetic rubber O-rings.

**FLAT DIPSTICK**

Flat section phosphatised steel.

On request and for sufficient quantities dipstick can be supplied in different lengths and/or complete with MAX-MIN level lines.

**STANDARD EXECUTIONS**

- **TP-C+a-RC**: without side hole.
- **TP-CF+a-RC**: with side breather hole.

**MAXIMUM CONTINUOUS WORKING TEMPERATURE**

60°C.

**GRAPHIC SYMBOL "FILL"**

According to DIN regulations.

**MOUNTING**

Push-fit avoids the need to screw/unscrew.

**FEATURES AND APPLICATIONS**


Suitable for use when it is necessary to avoid the loss of the cap. The elastic fork, housed in the special groove of the cap, can rotate freely.

**ACCESSORIES ON REQUEST**

- CT-S: technopolymer and stainless steel ball chains (see page-).
- GN 111 stainless steel and brass ball chains (see page-).
- CV-T polyethylene and stainless steel retaining cables (see page-).
- GN 111.2 stainless steel retaining cables (see page-).
- GN 111.4 polyurethane and stainless steel spiral retaining cables (see page-).
- GN 111.8 AISI 316 stainless steel retaining cables (see page-).



ELESA Original design

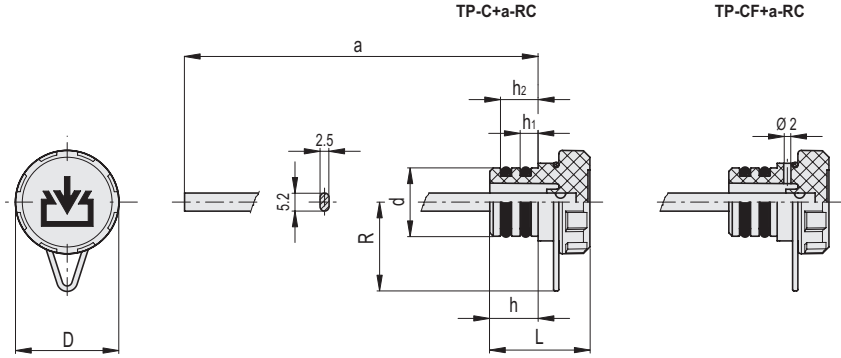

**TP-C+a-RC**

| Code     | Description     | d  | h  | D  | L    | R    | h1  | h2 | a   | Mounting hole<br>d+0.2 | ⚖  |
|----------|-----------------|----|----|----|------|------|-----|----|-----|------------------------|----|
| 60505-C9 | TP-C.18+A-RC-C9 | 18 | 13 | 26 | 28   | 22.5 | 4.5 | 10 | 189 | 18                     | 34 |
| 60515-C9 | TP-C.20+A-RC-C9 | 20 | 14 | 30 | 29   | 24   | 5   | 11 | 189 | 20                     | 37 |
| 60535-C9 | TP-C.26+A-RC-C9 | 26 | 14 | 35 | 29.5 | 26.5 | 5   | 11 | 189 | 26                     | 39 |

**TP-CF+a-RC**

| Code     | Description      | d  | h  | D  | L    | R    | h1  | h2 | a   | Mounting hole<br>d+0.2 | ⚖  |
|----------|------------------|----|----|----|------|------|-----|----|-----|------------------------|----|
| 60545-C9 | TP-CF.18+A-RC-C9 | 18 | 13 | 26 | 28   | 22.5 | 4.5 | 10 | 189 | 18                     | 34 |
| 60555-C9 | TP-CF.20+A-RC-C9 | 20 | 14 | 30 | 29   | 24   | 5   | 11 | 189 | 20                     | 37 |
| 60575-C9 | TP-CF.26+A-RC-C9 | 26 | 14 | 35 | 29.5 | 26.5 | 5   | 11 | 189 | 26                     | 39 |