

RoHS

圖9

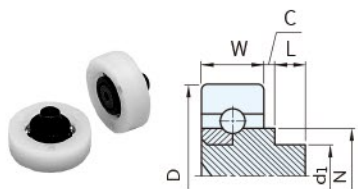


圖10

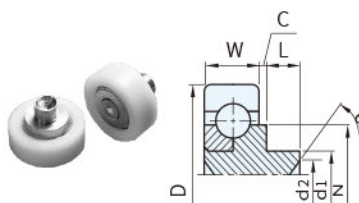


圖11

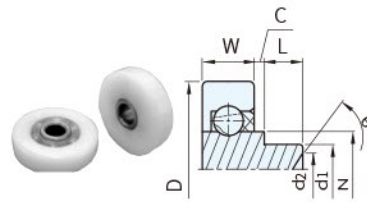


圖12


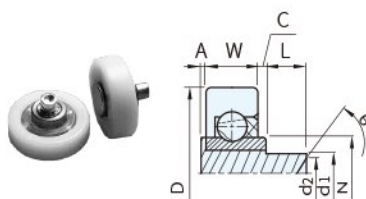


圖13

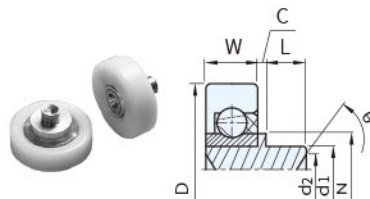

| | |
|----|-----|
| 外輪 | POM |
| 軸承 | 鋼 |

| 品號 | 備註 | D 0 -0.1 | d1 0 -0.1 | W 0 -0.2 | C ±0.4 | L ±0.2 | d2×θ*1 | A ±0.2 | N | 荷重 (N) | 庫存 | | | | | | | | |
|-----------------------|-----|----------------------------------|---------------------------------|--------------------------------|-----------|----------------------------------|-----------|-----------|------|-----------|-----|-----------|-----------|-------|---|---|---|------|--|
| K-DRS-9-A0.5 | 圖9 | 9 ⁰ _{-0.05} | 2 ⁰ _{-0.05} | 3 ⁰ _{-0.1} | 0.5 | 1.8 | - | | 4.0 | 9.8 | | | | | | | | | |
| K-DRS-12-A0.5 | | 12 ⁰ _{-0.05} | 3 ⁰ _{-0.05} | 4±0.1 | 0.5±0.3 | 2.3 | | | 6.5 | | | | | | | | | | |
| K-DRS-16-A1 | 圖10 | 16 ⁰ _{-0.3} | 4 | 5±0.2 | 1 | | - | | 9.0 | 19.6 | · | | | | | | | | |
| K-DRS-16-A1.5 | | | | | 6.35±0.2 | | | | | | | 1.5 | θ3×100° | | | | | | |
| K-DR-18-A0.5 | 圖11 | 18 | 5 | 6 | 0.5 | 3.5 | - | - | 8.2 | 29.4 | · | | | | | | | | |
| K-DR-19-A0.5 | | | | | 2 | | | | | | | θ4×120° | | | | | | | |
| K-DR-19-A2 | | | | | 2 | | | | | | | θ4.4×120° | | | | | | | |
| K-DR-22-A1 | | | | | 1 | | | | | | | θ4.4×90° | | | | | | | |
| K-DR-22-A2-6 | | | | | 2 | | | | | | | θ5.5×90° | | | | | | | |
| K-DR-22-A2 | | | | | 2 | | | | | | | θ4×90° | | | | | | | |
| K-DR-24-A1 | | | | | 24 | | | | | | | 5 | 1 | - | - | - | - | 78.4 | |
| K-DR-26-A1 | | | | | 26 | | | | | | | | | | | | | | |
| K-DR-28-A1 | | | | | 28 | | | | | | | | | | | | | | |
| K-DR-29-A1 | | | | | 29 | | | | | | | | | | | | | | |
| K-DR-22-AH(1)3.5-8019 | 圖12 | 22 | 4.5±0.1 | 7 | 0 | 3.5 ^{+0.3} ₀ | - | 1 | 9.5 | 196 | · | | | | | | | | |
| K-DR-22-AH2.5-3.65 | | | | | 2.5 | 3.65 | θ2.5×100° | | | | | | | | | | | | |
| K-DR-26-AH | | | | | 0 | 3.5 ^{+0.3} ₀ | - | 1±0.3 | | | | | | | | | | | |
| K-DR-26-AH2.5-3.65 | | | | | 2.5 | 3.65 | θ2.5×100° | 1 | | | | | | | | | | | |
| K-DR-26-AH2.7-2.7 | | | | | 26 | 3.9 ⁰ _{-0.2} | 2.7 | 2.7 | | | | 2.7 | θ2.3×110° | 1±0.3 | | | | | |
| K-DR-26-AH2.7-4 | | | | | | | | 4±0.3 | | | | θ2.7×120° | | | | | | | |
| K-DR-22-AH2.5 | 圖13 | 22 | 5 | 4.9 | 2.5 | 3.5 | θ4×110° | - | 11.0 | | | | | | | | | | |
| K-DR-22-AH3.8-2.5 | | | | | 3.8 | 2.5 | - | | | | | | | | | | | | |
| K-DR-22-AH4 | | | | | 26 | 5 | 4 | | | | 3.5 | θ4×110° | | | | | | | |
| K-DR-26-AH4 | | | | | | | | | | | | | | | | | | | |

Ps. 備註

- 溫度範圍：0°C~40°C
- 滾輪請勿施予軸向荷重
- 容許荷重是本公司300RPM/100萬回的測試值
- 1N=0.101972kgf
- *1是參考值

Wa. 注意

- 非庫存品必須以101pcs為單位購買之

訂貨： 交期： 天 庫存
K-DRS-16-A1.5 其它