



外輪	POM
軸承	鋼

圖 1(孔型)


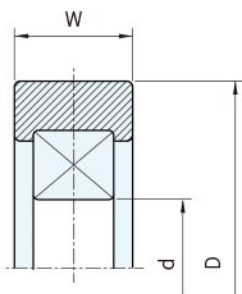


圖 2(螺栓軸)

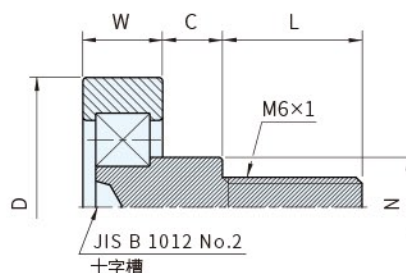

品號	備註	D	d	W	C	L	N	荷重 (N)	庫存			
K-DT-17-604ZZ-CB	圖 1	17	4	6	-	-	-	98	•			
K-DT-18-L1260ZZ		18	6					392	•			
K-DT-19-L1260ZZ		19						•				
K-DT-20-L1260ZZ		20	•									
K-DT-22-688ZZ		22	8	7				441	•			
K-DT-24-H6-626ZZ		24	6	8				490	•			
K-DT-26-H6-626ZZ		26	8	9				686	•			
K-DT-30-608ZZ		30		784				•				
K-DT-35-608ZZ		35		•								
K-DT-18-BH1-L1260ZZ	圖 2	18	-	6	1	8	9	392	•			
K-DT-19-BH1-L1260ZZ		19						•				
K-DT-20-BH1-L1260ZZ		20						•				
K-DT-22-BH1-688ZZ		22		7			12	441	•			
K-DT-24-BH1-626ZZ		24		8			9	490	•			
K-DT-26-BH1-626ZZ		26		9			12	784	•			
K-DT-30-BH1-608ZZ		30								686	•	
K-DT-35-BH1-608ZZ-9		35								784	•	
K-DT-26-BH0.5-626ZZ		26		8			0.5	10	490	•		
K-DT-26-BH2-9.5-626ZZ							2				9.5	•
K-DT-26-BH4-626ZZ							4				8	•
K-DT-26-BH6-14-626ZZ	6		14		•							

SP 特長

- 此軸承是由聚縮醛樹脂形成的金屬軸承插件
- 優良的回轉精度(振擺及背隙小)
- 可降低高荷重下運行的噪音

Wa 注意

· 非庫存品必須以101pcs為單位購買之

訂貨： 交期： 天

K-DT-17-604ZZ-CB

Ps 備註

- 溫度範圍：0°C~40°C
- 滾輪請勿施予軸向荷重
- 容許荷重是本公司300RPM/100萬回的測試值
- 1N=0.101972kgf