



圖15(铆合)

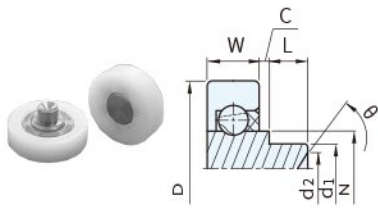


圖16(螺栓型)




圖17(螺栓型)




圖18(孔型)


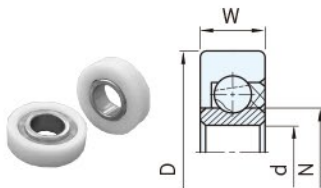


圖19(孔型)

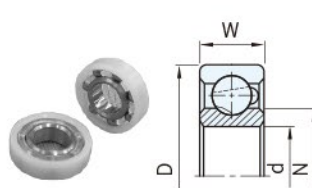

外輪	POM
軸承	SUS

品號	備註	D 0 -0.1	d +0.1 0	d1 0 -0.1	W 0 -0.2	C ±0.4	L ±0.2	d2×θ*1	N	荷重 (N)	庫存
K-DR-19-SAS0.5-GN	圖15	19		5	6	0.5	3.5 ⁰ _{-0.2}	ø4×120°	8.2		
K-DR-22-SAS1		22			7	1±0.3	3.4±0.1	ø4×90°	9.5		
K-DR-19-SBS0.5	圖16	19			6	0.5	8±0.5		8.2		
K-DR-22-SBS0.5-GN		22			7						
K-DR-22-SBS2	圖17	22				7	0.5±0.3		9.5		
K-DR-26-SBS0.5		26									
K-DR-30-SBS0.5		30									
K-DR-35-SBS0.5		35				0.5±0.3					
K-DR-18-SHS6-GN	圖18	18	6		6				8.2		
K-DR-19-SHS6		19									
K-DR-22-SHS6-GN		22									
K-DR-22-SHS8-GN		22	8	7					11.0		
K-DR-28-SHS6-GN		28	6								
K-DR-26-SHS10-GN		26	10		8				13.0	98	
K-DR-30-SHS10-GN		30									
K-DR-32-SHS12-GN		32	12		10				17.0	176	
K-DR-35-SHS15-GN		35	15		11				21.0		
K-DR-40-SHS17-GN		40	17		12				27.0	205	
K-DR-47-SHS20-GN		47	20		14				11.0	235	
K-DR-18-SHS8		圖19	18	8		5				11.0	-

Ps) 備註

- 溫度範圍：0°C~40°C
- 滾輪請勿施予軸向荷重
- 容許荷重是本公司300RPM/100萬回的測試值
- 1N=0.101972kgf
- *1是參考值

訂貨： 交期：

K-DRS-19-SAS0.5-GN

Wa) 注意

- 非庫存品必須以101pcs為單位購買之