



圖 1(鉚合)

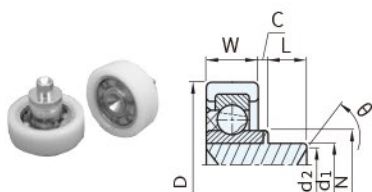


圖 2(鉚合)

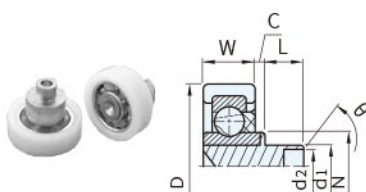


圖 3(鉚合)

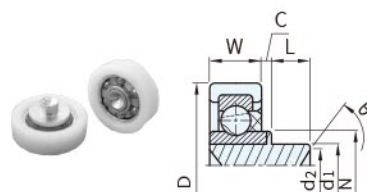


圖 4(孔型)


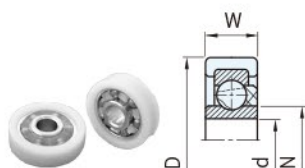


圖 5(孔型)

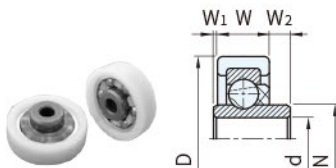

外輪	POM
軸承	鋼

品號	備註	D 0 -0.1	d +0.1 0	d1 0 -0.1	W ±0.2	C ±0.4	L ±0.2	d2×θ*1	W1	W2	N	荷重 (N)	庫存
K-ID-18.8-AH5	圖1	18.8	-	4	7	5	3.5	ø3×90°			8.2	343	
K-ID-18.8-AH5-5							5						
K-ID-19-AH2.5	圖2	19 ⁰ _{-0.3}	-	5	7	2.5	3.5	ø3×120°			10.0	343	
K-ID-19-AH5.5							5.5						
K-ID-24-AH1-3.6	圖3	24±0.2		6	8	1	3.6	ø5.5×90°	-	-	13.0	343	
K-ID-19-H6	圖4	19 ⁰ _{-0.3}	6	-	7	-	-	-			8.2	343	
K-ID-22-H6	圖5	22	-	4	7	-	-	-	0.5	3	9.5	343	
K-ID-22-H4W(0.5)3													

Ps) 備註

- 溫度範圍：0°C~40°C
- 滾輪請勿施予軸向荷重
- 容許荷重是本公司300RPM/100萬回的測試值
- 1N=0.101972kgf
- *1是參考值

訂貨： 交期：

K-ID-18.8-AH5

Wa) 注意

- 非庫存品必須以101pcs為單位購買之